


LE05AL NSK

Linear guides

TYPE: Monorail guidance systems, Recirculating balls, Four directional iso-load carrying type, High moment load carrying type (Wide rail type), Square type, Low, Ball slide length - standard, Mounting tap

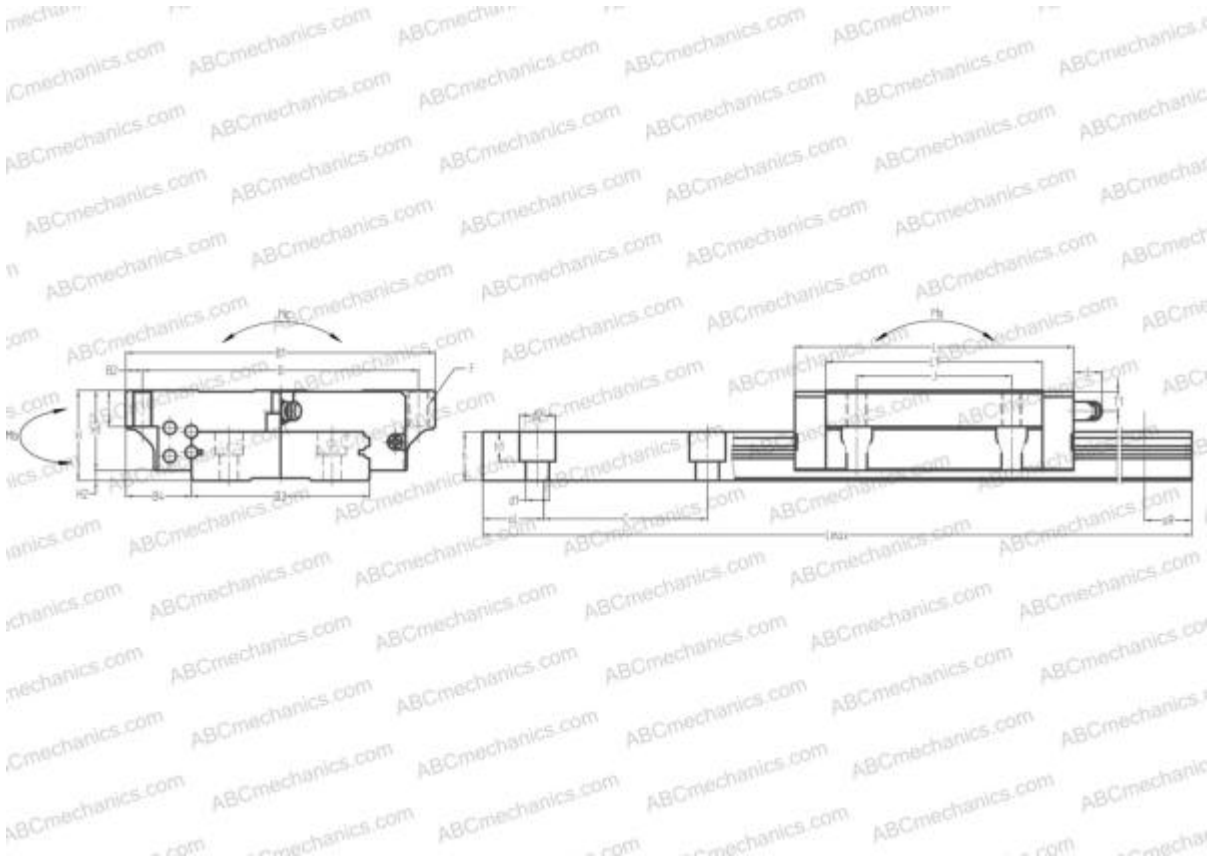

Technical specification

DIMENSIONS, MM

B1	17,000
H	6,500
L	24,000
B	13,000
L1	17,000
D2	5,000
B2	2,000
B3	10,000
B4	3,500
H1	5,100
H2	1,400
C	20,000
d1	3,000
d2	5,000
h	4,000

CALCULATION DATA

Static permissible moment, Ma	0,002 kN-m
Static permissible moment, Mb	0,002 kN-m
Static permissible moment, Mc	0,004 kN-m

DIMENSIONS, MM

h1	1,600
L max	150,000
aL	7,500
aR	7,500
F	M2.5x0.45x2

WEIGHT

Slide weight	0,011
Rail weight	0,034

MANUFACTURER

[NSK](#)

INTERCHANGE

ABC	LE05AL
IKO	LWLF10..B

CALCULATION DATA

Basic dynamic load rating, C	0,570 kN
Basic static load rating, Co	0,900 kN