


## LE09AL NSK

Linear guides

TYPE: Monorail guidance systems, Recirculating balls, Four directional iso-load carrying type, High moment load carrying type (Wide rail type), Square type, Low, Ball slide length - standard, Mounting tap

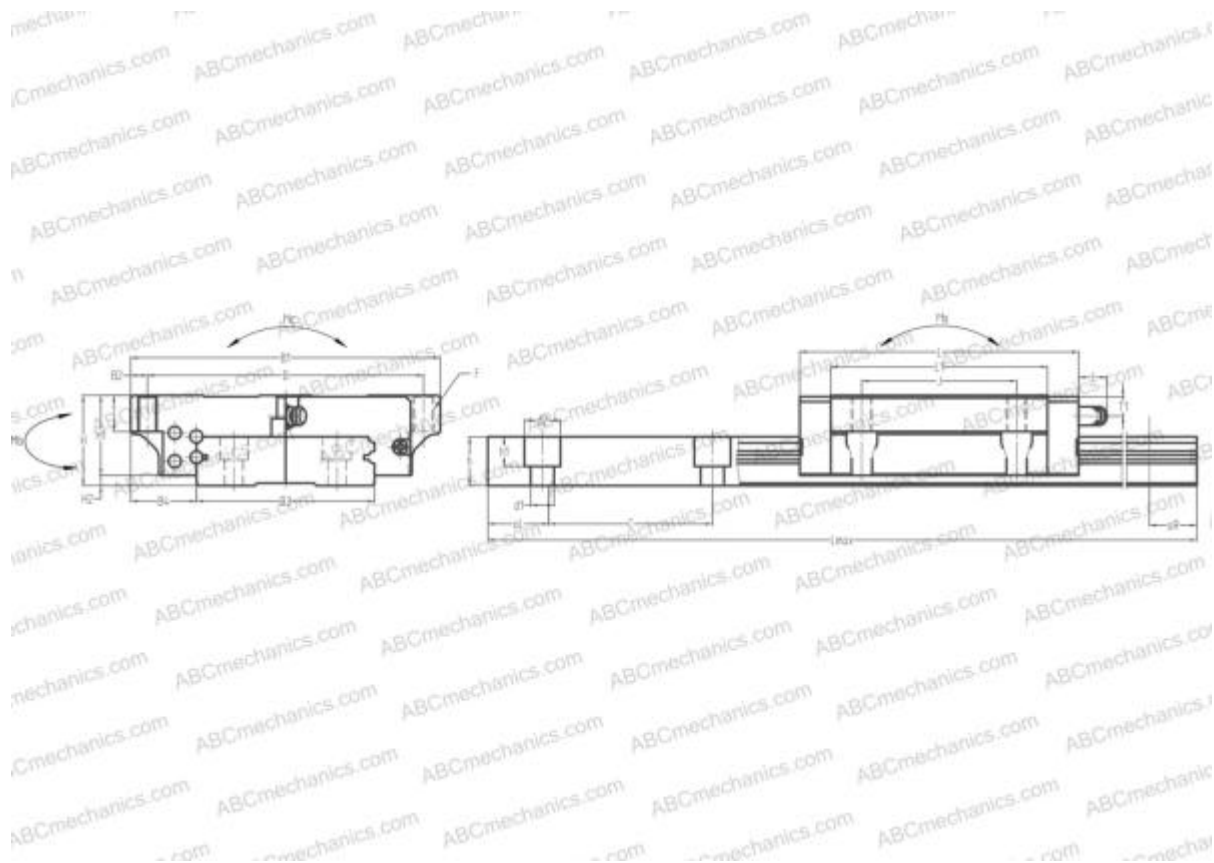

### Technical specification

#### DIMENSIONS, MM

B1	30,000
H	12,000
L	39,000
B	21,000
J	12,000
L1	27,600
D2	9,000
B2	4,500
B3	18,000
B4	6,000
H1	8,000
H2	4,000
C	30,000
d1	3,500
d2	6,000

#### DIMENSIONS, MM

h	7,500
h1	4,500
L max	800,000
aL	10,000
aR	10,000
F	M2.6x0.45x3

#### WEIGHT

Slide weight	0,040
Rail weight	0,095

#### MANUFACTURER

[NSK](#)

#### INTERCHANGE

ABC	<a href="#">LE09AL</a>
THK	<a href="#">RSR9WVM</a>
IKO	<a href="#">LWLF18</a>

**CALCULATION DATA**

Basic dynamic load rating, C	2,450 kN
Basic static load rating, Co	3,750 kN
Static permissible moment, Ma	0,017 kN-m
Static permissible moment, Mb	0,017 kN-m
Static permissible moment, Mc	0,032 kN-m