


LE09TR NSK

Linear guides

TYPE: Monorail guidance systems, Recirculating balls, Four directional iso-load carrying type, High moment load carrying type (Wide rail type), Square type, Low, Ball slide length - standard, Mounting tap

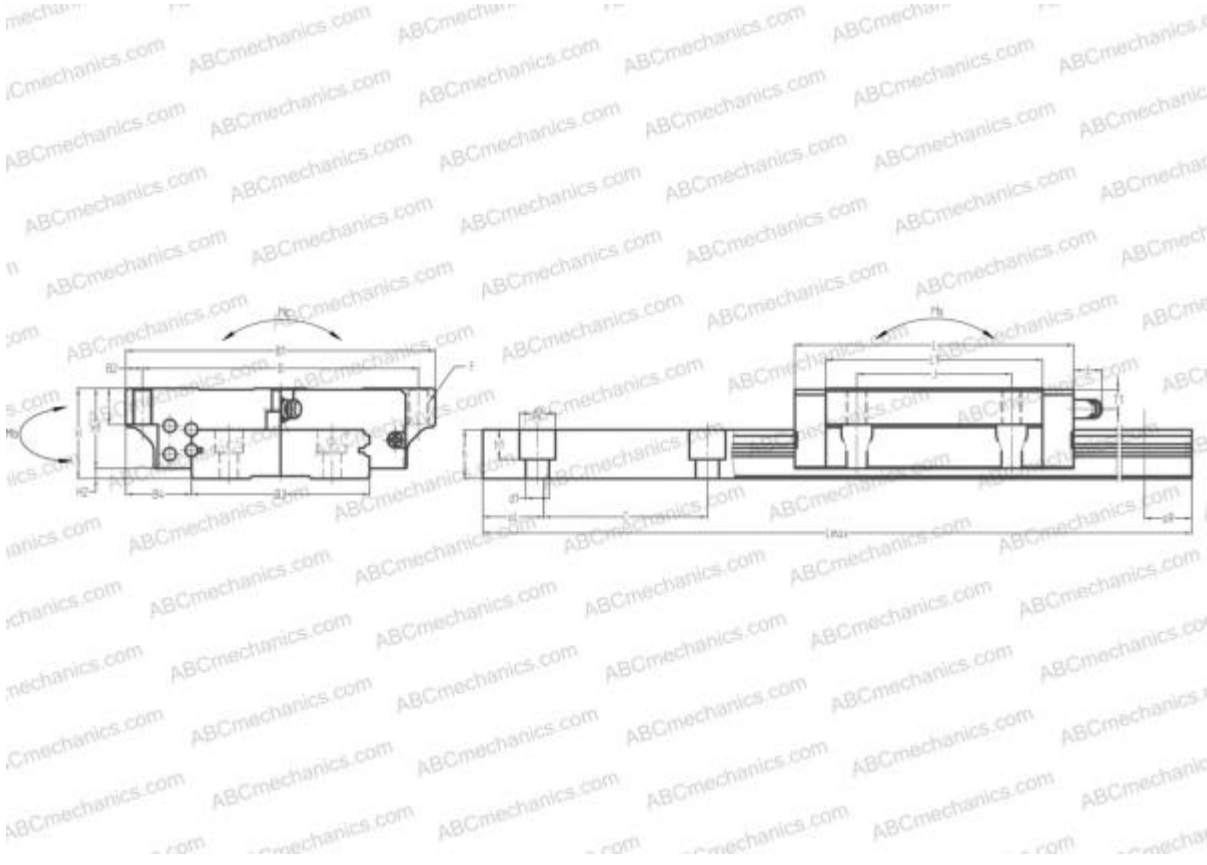

Technical specification



DIMENSIONS, MM

B1	30,000
H	12,000
L	39,800
B	21,000
J	12,000
L1	27,600
D2	9,000
B2	4,500
B3	18,000
B4	6,000
H1	8,000
H2	4,000
C	30,000
d1	3,500
d2	6,000

INTERCHANGE

STAR	0443-8
NB	SEBS 9WA

CALCULATION DATA

Basic dynamic load rating, C	2,450 kN
Basic static load rating, Co	3,750 kN
Static permissible moment, Ma	0,017 kN-m
Static permissible moment, Mb	0,017 kN-m
Static permissible moment, Mc	0,032 kN-m

INCLUDED PRODUCTS

LAE09TR

DIMENSIONS, MM

h	7,500
h1	4,500
L max	800,000
aL	10,000
aR	10,000
F	M3x0.5x3

WEIGHT

Slide weight	0,040
Rail weight	0,095

MANUFACTURER

[NSK](#)

INTERCHANGE

ABC	LE09TR
THK	RSH9WZM
IKO	LWLF18..B*
HIWIN	MGW9C*

