


LE15AR NSK

Linear guides

TYPE: Monorail guidance systems, Recirculating balls, Four directional iso-load carrying type, High moment load carrying type (Wide rail type), Square type, Low, Ball slide length - standard, Mounting tap

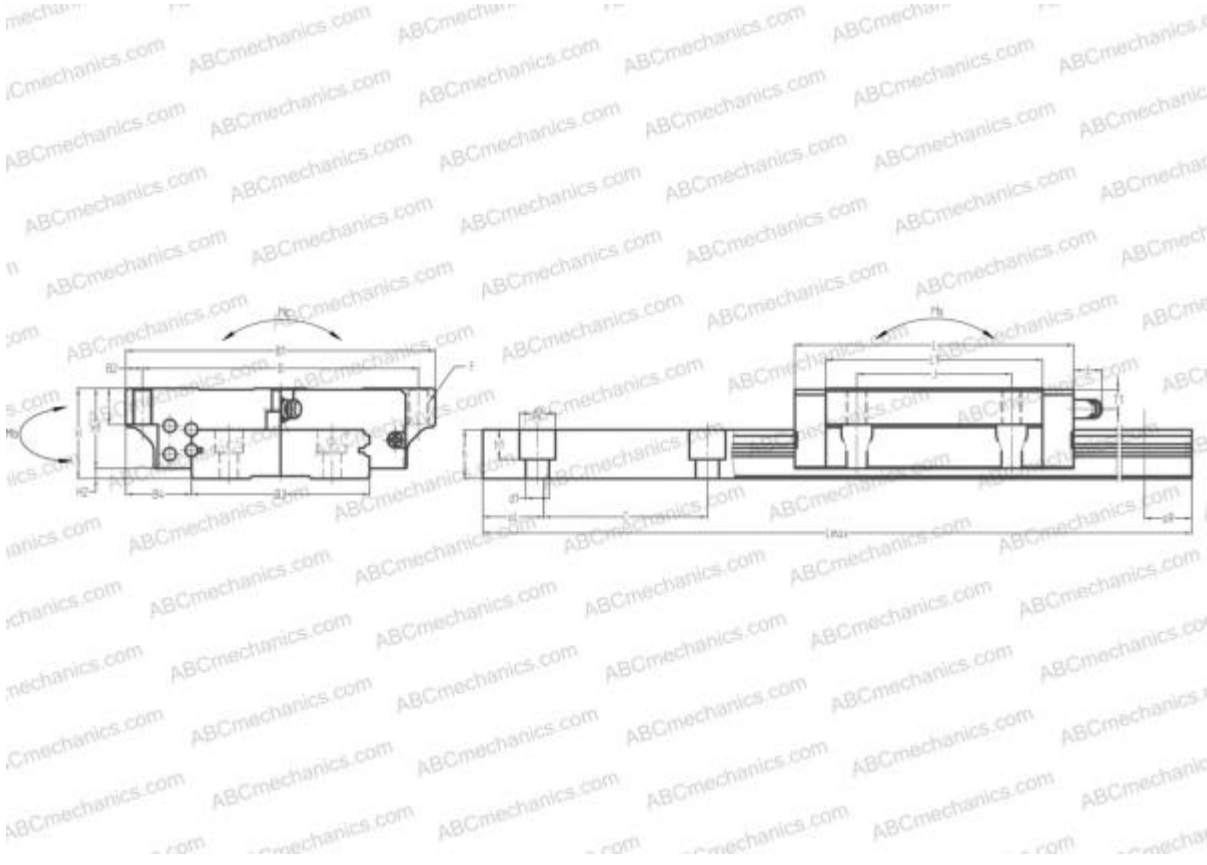

Technical specification



DIMENSIONS, MM

B1	60,000
H	16,000
L	56,600
B	45,000
J	20,000
L1	38,400
D1	23,000
D2	9,500
B2	7,500
B3	42,000
B4	9,000
H1	12,000
H2	4,000
C	40,000
d1	4,500

INTERCHANGE

HIWIN	MGW15C*
STAR	0443-5
NB	SEBS 15WA

CALCULATION DATA

Basic dynamic load rating, C	6,200 kN
Basic static load rating, Co	8,750 kN
Static permissible moment, Ma	0,048 kN-m
Static permissible moment, Mb	0,048 kN-m
Static permissible moment, Mc	0,174 kN-m

INCLUDED PRODUCTS

LAE15AR

DIMENSIONS, MM

d2	8,000
h	9,500
h1	4,500
L max	1200,000
aL	15,000
aR	15,000
F	M4x0.7x4.5

WEIGHT

Slide weight	0,150
Rail weight	0,275

MANUFACTURER

[NSK](#)

INTERCHANGE

ABC	LE15AR
THK	RSH15WZM*
IKO	LWLF42..B

