


LE07UL NSK

Linear guides

TYPE: Monorail guidance systems, Recirculating balls, Four directional iso-load carrying type, High moment load carrying type (Wide rail type), Square type, Low, Ball slide length - long, Mounting tap

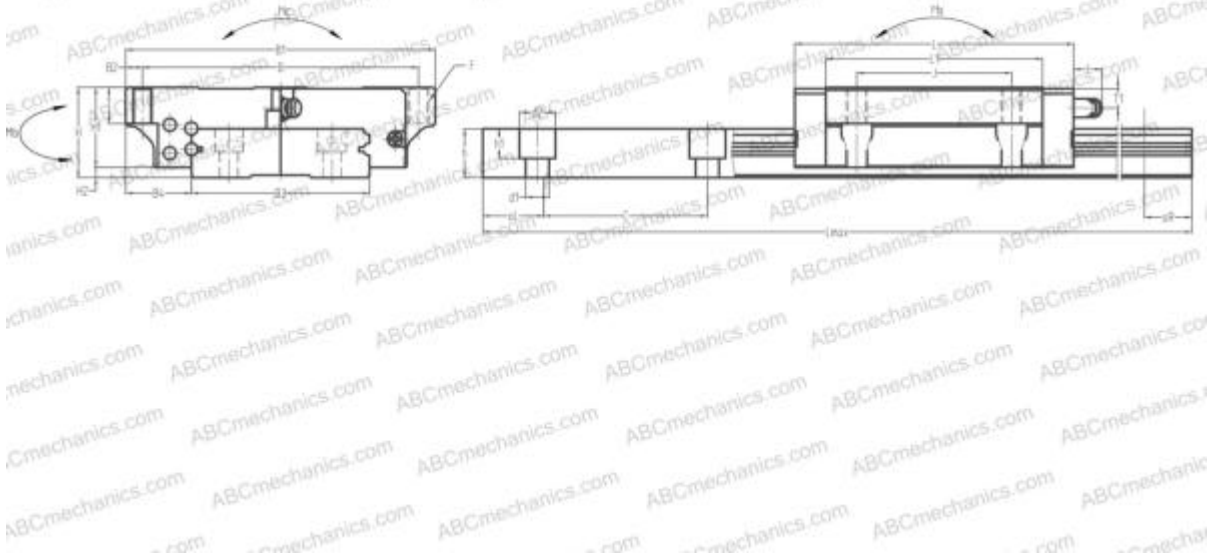

Technical specification

DIMENSIONS, MM

B1	25,000
H	9,000
L	42,000
B	19,000
J	19,000
L1	32,200
D2	7,000
B2	3,000
B3	14,000
B4	5,500
H1	7,000
H2	2,000
C	30,000
d1	3,500
d2	6,000

DIMENSIONS, MM

h	5,200
h1	3,200
L max	600,000
aL	10,000
aR	10,000
F	M3x0.5x3

WEIGHT

Slide weight	0,039
Rail weight	0,055

MANUFACTURER

[NSK](#)

INTERCHANGE

ABC	LE07UL
IKO	LWLF14..B
HIWIN	MGW7H

CALCULATION DATA

Basic dynamic load rating, C	1,670 kN
Basic static load rating, Co	2,940 kN
Static permissible moment, Ma	0,013 kN-m
Static permissible moment, Mb	0,013 kN-m
Static permissible moment, Mc	0,021 kN-m