


LE15BL NSK

Linear guides

TYPE: Monorail guidance systems, Recirculating balls, Four directional iso-load carrying type, High moment load carrying type (Wide rail type), Square type, Low, Ball slide length - long, Mounting tap

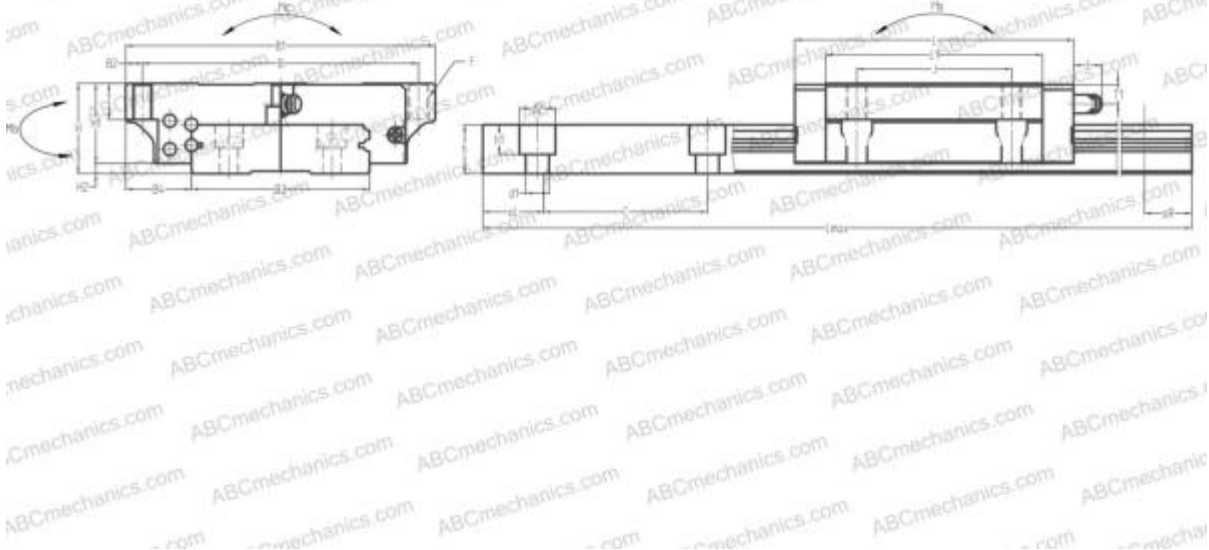

Technical specification

DIMENSIONS, MM

B1	60,000
H	16,000
L	74,500
B	45,000
J	35,000
L1	57,800
D1	23,000
D2	9,500
B2	7,500
B3	42,000
B4	9,000
H1	12,000
H2	4,000
C	40,000
d1	4,500

DIMENSIONS, MM

d2	8,000
h	9,500
h1	4,500
L max	1200,000
aL	15,000
aR	15,000
F	M4x0.7x4.5

WEIGHT

Slide weight	0,235
Rail weight	0,275

MANUFACTURER

[NSK](#)

INTERCHANGE

ABC	LE15BL
THK	RSR15WN
IKO	LWLF42..B

INTERCHANGE

HIWIN

[MGW15H](#)**CALCULATION DATA**

Basic dynamic load rating, C	8,230 kN
Basic static load rating, Co	13,000 kN
Static permissible moment, Ma	0,112 kN-m
Static permissible moment, Mb	0,112 kN-m
Static permissible moment, Mc	0,259 kN-m