


LE12CL NSK

Linear guides

TYPE: Monorail guidance systems, Recirculating balls, Four directional iso-load carrying type, High moment load carrying type (Wide rail type), Square type, Low, Ball slide length - short, Mounting tap

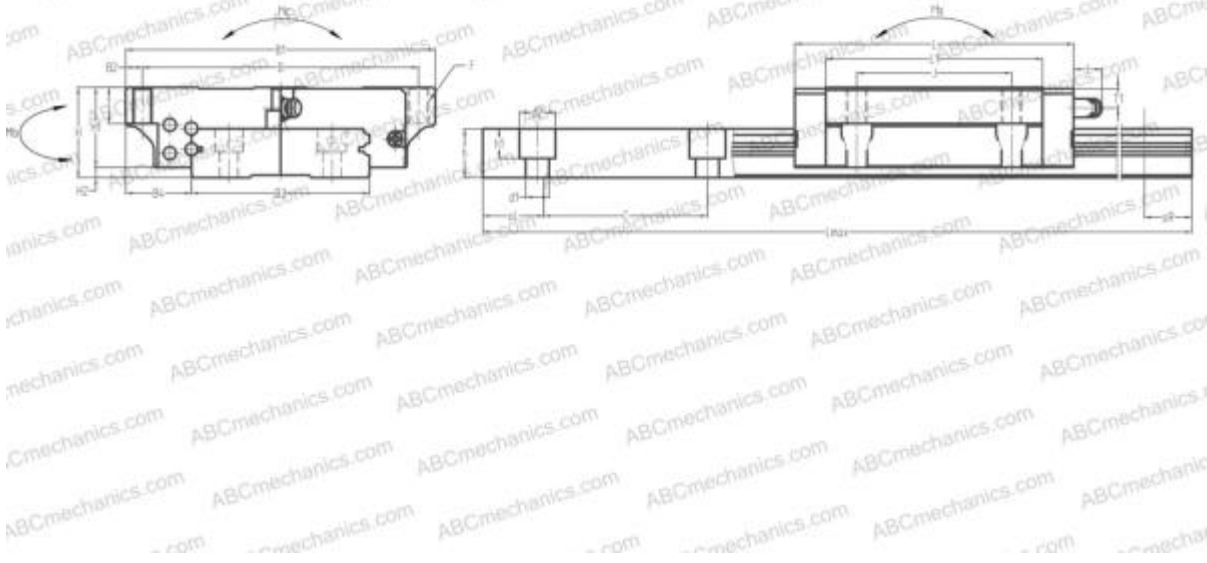

Technical specification

DIMENSIONS, MM

B1	40,000
H	14,000
L	30,500
B	28,000
L1	17,500
D2	12,000
B2	6,000
B3	24,000
B4	8,000
H1	10,000
H2	4,000
C	40,000
d1	4,500
d2	8,000
h	8,500

CALCULATION DATA

Static permissible moment, Ma	0,008 kN-m
Static permissible moment, Mb	0,008 kN-m
Static permissible moment, Mc	0,031 kN-m

DIMENSIONS, MM

h1	4,500
L max	1000,000
aL	15,000
aR	15,000
F	M3x0.5x4

WEIGHT

Slide weight	0,050
Rail weight	0,140

MANUFACTURER

[NSK](#)

INTERCHANGE

ABC	LE12CL
IKO	LWF24..B

CALCULATION DATA

Basic dynamic load rating, C	2,260 kN
Basic static load rating, Co	2,840 kN