




## CR 17780 CR

## Radial shaft seals

TYPE: Radial shaft seals, Metal case and a secondary reinforcement in the side face, With springloaded sealing slip, Type CRWHA1, material FPM/FKM (SKF)

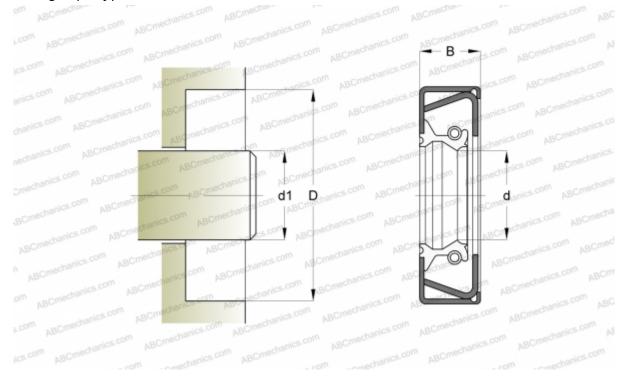

44,907 44,907 60,020 7,950

CR

17780

-40 °C 200 °C

## **Technical specification**

lechnical specification
DIMENSIONS, MM
dl
d
D
В
SKF
CALCULATION DATA
Operating temperature min
Operating temperature max
Permissible operating temperature,

Permissible operating temperature,	220 °C
short periods max	
Pressure differential max	0,070 Mpa
Maximum shaft surface speed	18,000 m/s

