


CR 45112 CR

Radial shaft seals

TYPE: Radial shaft seals, Metal case and a secondary reinforcement in the side face, With spring-loaded sealing slip, Type CRWHA1, material FPM/FKM (SKF)

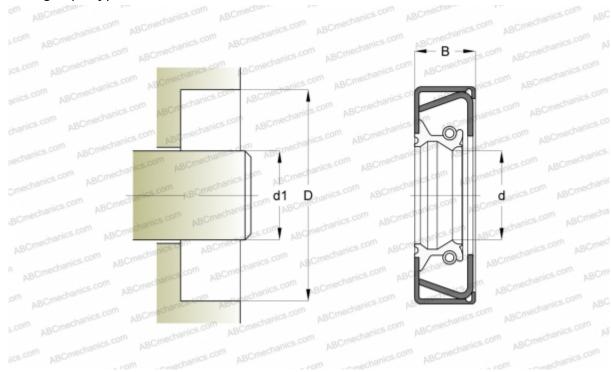

Technical specification

DIMENSIONS, MM

| Diricitorotto, min | |
|------------------------------------|--------------|
| d1 | 114,300 |
| d | 114,300 |
| D | 152,425 |
| В | 12,700 |
| MANUFACTURER | CR |
| INTERCHANGE | |
| SKF | <u>45112</u> |
| CALCULATION DATA | |
| Operating temperature min | -40 °C |
| Operating temperature max | 200 °C |
| Permissible operating temperature, | 220 °C |
| short periods max | |
| Pressure differential max | 0,070 Mpa |
| Maximum shaft surface speed | 18,000 m/s |

