


Applounted bearings and housings

SY 1. TR SKF

Ball bearing units

TYPE: Housing units, Plummer block, Cast iron housing, Radial insert ball bearing with grub screws in inner ring, Type SY..TR (SKF), inch

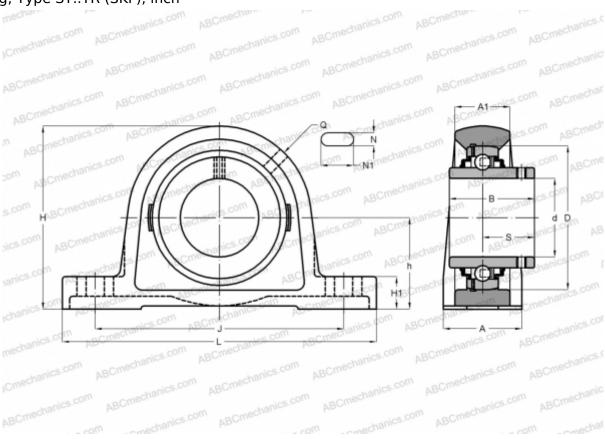

Bearing

Technical specification

| DIMENSIONS, MM | |
|----------------|---------|
| d | 25,400 |
| D | 52,000 |
| В | 34,100 |
| L | 130,000 |
| Н | 70,500 |
| A | 36,000 |
| J | 102,000 |
| A1 | 22,000 |
| H1 | 16,000 |
| N | 11,500 |
| N1 | 19,500 |
| S | 19,800 |
| h | 36,500 |
| WEIGHT, KG | 0,720 |

| Housing | SY 505 M |
|------------------------------|------------|
| MANUFACTURER | SKF |
| CALCULATION DATA | |
| Basic dynamic load rating, C | 14,000 kN |
| Basic static load rating, Co | 7,800 kN |
| Fatigue load limit, Pu | 0,335 kN |
| Limiting speed | 4300 r/min |
| | |
| | |
| | |

YAR 205-100-

