
ABGounted bearings and housings

P 40 RM SKF

Ball bearing units

TYPE: Housing units, Plummer block, Sheet steel housing, Radial insert ball bearing with grub screws in inner ring, Type P..RM (SKF)

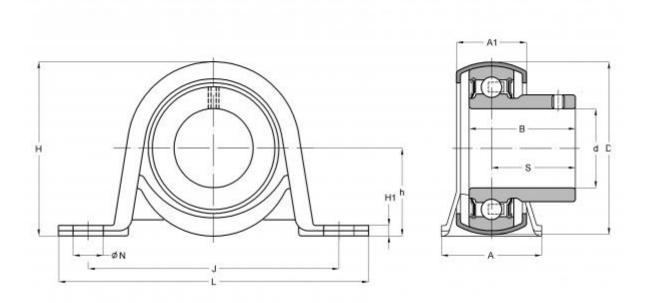

Technical specification

| DIMENSIONS, MM | |
|----------------|---------|
| d | 40,000 |
| D | 80,000 |
| В | 36,000 |
| L | 148,000 |
| Н | 86,000 |
| A | 43,000 |
| J | 120,000 |
| A1 | 29,000 |
| H1 | 5,000 |
| N | 14,000 |
| S | 25,300 |
| h | 43,500 |
| WEIGHT. KG | 0.800 |

| Bearing | YAT 208 |
|------------------------------|-----------|
| Housing | P 80 |
| MANUFACTURER | SKF |
| CALCULATION DATA | |
| Basic dynamic load rating, C | 30,700 kN |
| Basic static load rating, Co | 19,000 kN |
| Fatigue load limit, Pu | 0,800 kN |
| | |

