


## ABGounted bearings and housings

## P 17 FM SKF

Ball bearing units

TYPE: Housing units, Plummer block, Sheet steel housing, Radial insert ball bearing with eccentric locking collar, Type P..FM (SKF)

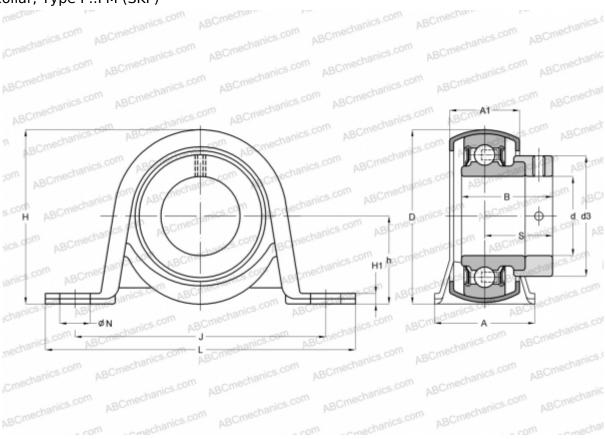

## **Technical specification**

| DIMENSIONS, MM |        |
|----------------|--------|
| d              | 17,000 |
| D              | 40,000 |
| В              | 28,600 |
| L              | 86,000 |
| Н              | 44,000 |
| A              | 26,000 |
| J              | 68,000 |
| A1             | 18,000 |
| H1             | 3,000  |
| N              | 9,600  |
| S              | 22,100 |
| h              | 22,000 |
| WEIGHT, KG     | 0 180  |

| Bearing                      | YET 203  |
|------------------------------|----------|
| Housing                      | P 40     |
| MANUFACTURER                 | SKF      |
| CALCULATION DATA             |          |
| Basic dynamic load rating, C | 9,560 kN |
| Basic static load rating, Co | 4,750 kN |
| Fatigue load limit, Pu       | 0,200 kN |
|                              |          |

