




## P 3/4 FM SKF

Ball bearing units

TYPE: Housing units, Plummer block, Sheet steel housing, Radial insert ball bearing with eccentric locking collar, Type P..FM (SKF), inch

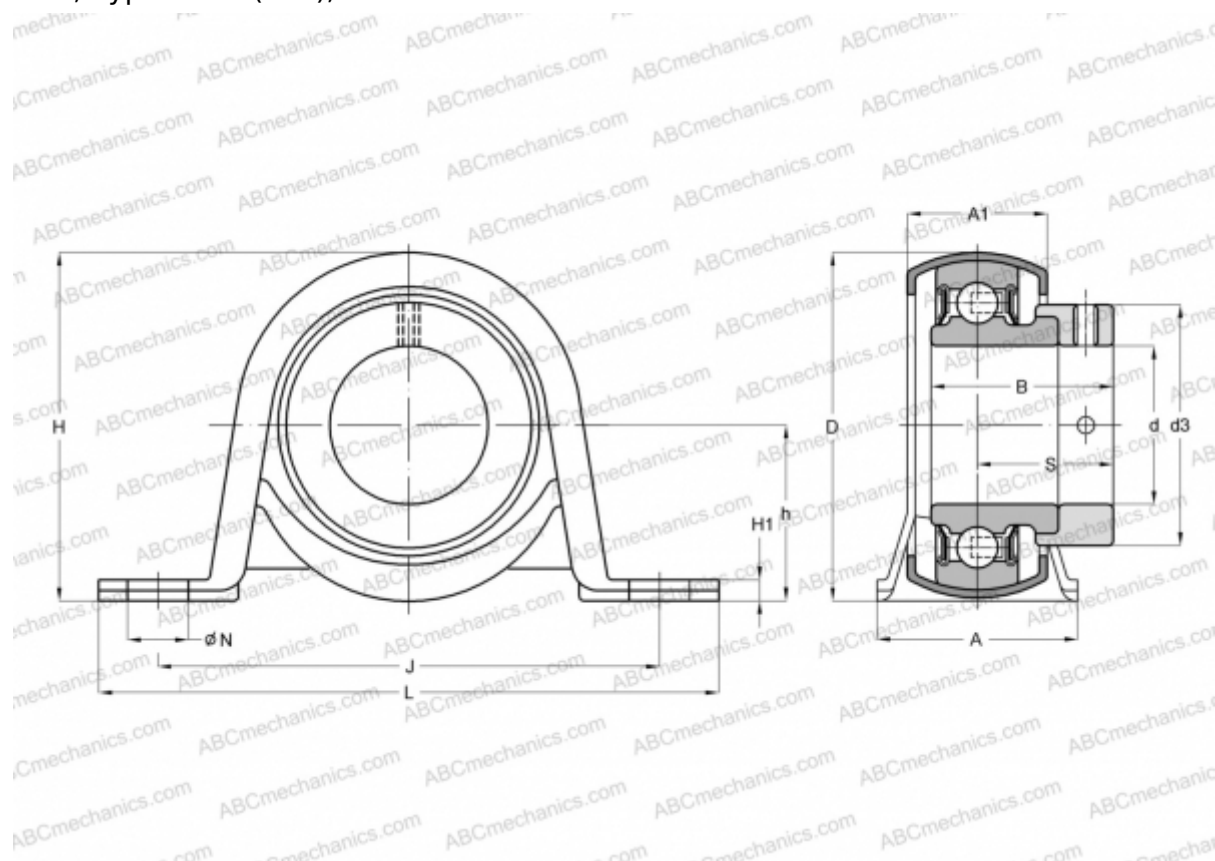

### Technical specification

#### DIMENSIONS, MM

|    |        |
|----|--------|
| d  | 19,050 |
| D  | 47,000 |
| B  | 31,000 |
| L  | 99,000 |
| H  | 50,000 |
| A  | 32,000 |
| J  | 76,000 |
| A1 | 21,000 |
| H1 | 3,000  |
| N  | 9,600  |
| S  | 23,500 |
| h  | 25,200 |

**WEIGHT, KG** 0,260

|         |             |
|---------|-------------|
| Bearing | YET 204-012 |
| Housing | P 47        |

#### MANUFACTURER

[SKF](#)

#### CALCULATION DATA

|                              |           |
|------------------------------|-----------|
| Basic dynamic load rating, C | 12,700 kN |
| Basic static load rating, Co | 6,550 kN  |
| Fatigue load limit, Pu       | 0,280 kN  |