


ABGounted bearings and housings

FY 60 TR SKF

Ball bearing units

TYPE: Housing units, Four-bolt flanged housing units, Cast iron housing, Radial insert ball bearing with grub screws in inner ring, Type FY..TR (SKF)

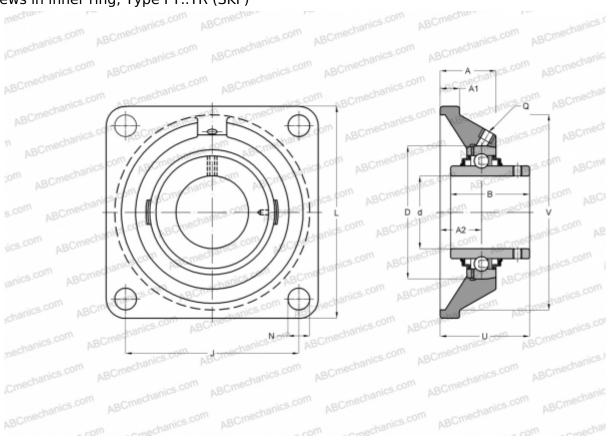

Technical specification

| DIMENSIONS, MM | |
|----------------|-------------|
| d | 60,000 |
| D | 60,000 |
| В | 65,100 |
| L | 175,000 |
| Α | 52,000 |
| J | 143,000 |
| A1 | 17,000 |
| N | 18,000 |
| U | 73,700 |
| V | 161,900 |
| WEIGHT, KG | 4,600 |
| Bearing | YAR 212-2RF |
| Housing | FY 512 M |
| | |

| Protective cover | ECY 212 |
|------------------------------|------------|
| MANUFACTURER | SKF |
| CALCULATION DATA | |
| Basic dynamic load rating, C | 52,700 kN |
| Basic static load rating, Co | 36,000 kN |
| Fatigue load limit, Pu | 1,530 kN |
| Limiting speed | 1800 r/min |

