


Almounted bearings and housings

FYTB 25 TR SKF

Ball bearing units

TYPE: Housing units, Two-bolt flanged housing units, Cast iron housing, Radial insert ball bearing with grub screws in inner ring, Type FYTB..TR (SKF)

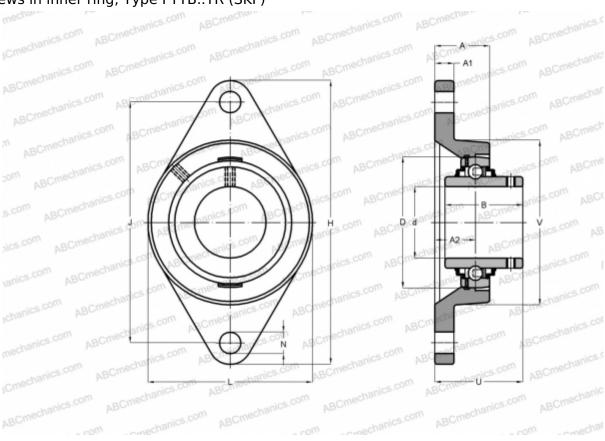

Bearing

Technical specification

| DIMENSIONS, MM | |
|----------------|---------|
| d | 25,000 |
| D | 52,000 |
| В | 34,100 |
| L | 70,000 |
| Н | 124,000 |
| A | 30,000 |
| J | 99,000 |
| A1 | 12,000 |
| A2 | 19,000 |
| N | 11,500 |
| U | 38,800 |
| V | 63,500 |
| WEIGHT. KG | 0.630 |

| Housing | FYTB 505 M |
|------------------------------|------------|
| Protective cover | ECY 205 |
| MANUFACTURER | SKF |
| CALCULATION DATA | |
| Basic dynamic load rating, C | 14,000 kN |
| Basic static load rating, Co | 7,800 kN |
| Fatigue load limit, Pu | 0,335 kN |
| Limiting speed | 4300 r/min |
| | |

YAR 205-2RF

