


## Applounted bearings and housings

## **FYTJ 30 KF SKF**

Ball bearing units

TYPE: Housing units, Two-bolt flanged housing units, Cast iron housing, Radial insert ball bearing with adapter sleeve, Type FYTJ..KF (SKF), inch

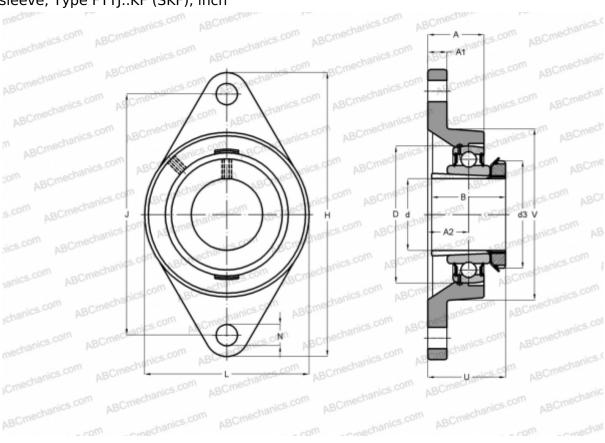

## **Technical specification**

DIMENSIONS, MM	
d	25,400
D	62,000
В	38,000
L	80,000
Н	148,000
A	30,500
J	117,000
A1	13,500
A2	18,000
N	16,000
d3	45,000
U	40,000
V	76,200
WEIGHT. KG	0.830

Bearing	YSA 206-2FK
Housing	FYTJ 506
Adapter sleeve	HE 2306
MANUFACTURER	SKF
CALCULATION DATA	
Basic dynamic load rating, C	19,500 kN
Basic static load rating, Co	11,200 kN
Fatigue load limit, Pu	0,475 kN
Limiting speed	6300 r/min

VCV 206 2EK

