


ABGounted bearings and housings

FYC 25 TF SKF

Ball bearing units

TYPE: Housing units, Four-bolt flanged housing units, Cast iron housing, Radial insert ball bearing with grub screws in inner ring, Type FYC..TF (SKF)

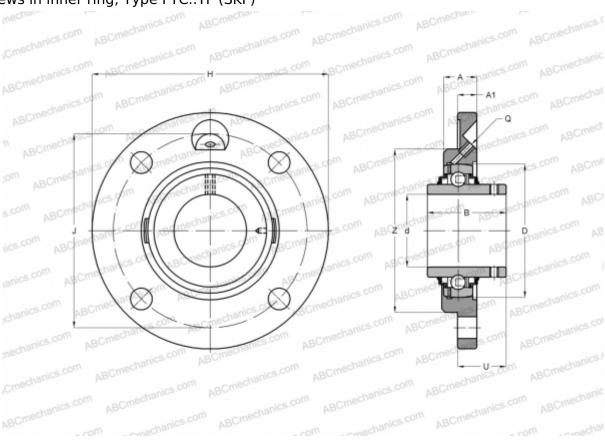

Technical specification

d 25,000 D 52,000 B 34,100 H 115,000 A 27,000 J 90,000 A1 7,000 U 29,800 Z 70,000 WEIGHT, KG 0,930	DIMENSIONS, MM	
B 34,100 H 115,000 A 27,000 J 90,000 A1 7,000 U 29,800 Z 70,000	d	25,000
H 115,000 A 27,000 J 90,000 A1 7,000 U 29,800 Z 70,000	D	52,000
A 27,000 J 90,000 A1 7,000 U 29,800 Z 70,000	В	34,100
J 90,000 A1 7,000 U 29,800 Z 70,000	Н	115,000
A1 7,000 U 29,800 Z 70,000	Α	27,000
U 29,800 Z 70,000	J	90,000
Z 70,000	A1	7,000
.,	U	29,800
WEIGHT, KG 0,930	Z	70,000
	WEIGHT, KG	0,930
Bearing YAR 205-2F	Bearing	YAR 205-2F
Housing FYC 505	Housing	FYC 505

MANUFACTURER	SKF
CALCULATION DATA	
Basic dynamic load rating, C	14,000 kN
Basic static load rating, Co	7,800 kN
Fatigue load limit, Pu	0,335 kN
Limiting speed	7000 r/min

