
PFT 17 RM SKF

Ball bearing units

TYPE: Housing units, Two-bolt flanged housing units, Sheet steel housing, Radial insert ball bearing with grub screws in inner ring, Type PFT..RM (SKF)

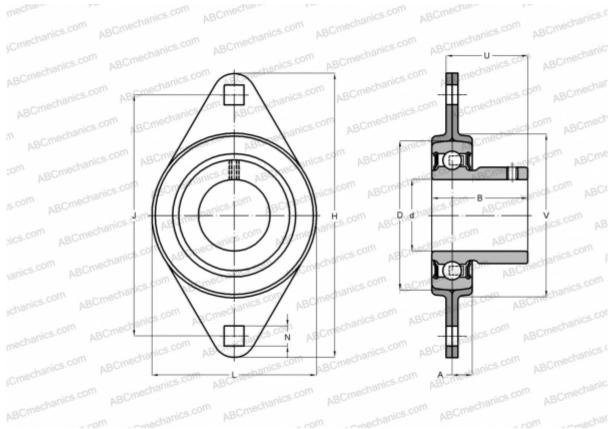

Technical specification

DIMENSIONS, MM

| d | 17,000 |
|------------|---------|
| D | 40,000 |
| В | 22,100 |
| н | 81,000 |
| A | 7,000 |
| J | 63,000 |
| H1 | 59,000 |
| Ν | 7,100 |
| U | 17,900 |
| V | 49,000 |
| WEIGHT, KG | 0,160 |
| Bearing | YAT 203 |
| Housing | PFT 40 |
| | |

MANUFACTURER

<u>SKF</u>

CALCULATION DATA

| Basic dynamic load rating, C | 9,560 kN |
|------------------------------|----------|
| Basic static load rating, Co | 4,750 kN |
| Fatigue load limit, Pu | 0,200 kN |

