




SY 20 TF/VA228 SKF

Ball bearing units

TYPE: Housing units, Plummer block, Cast iron housing, Radial insert ball bearing with grub screws in inner ring, Type SY..TF/VA228, high temperature, for high demands (-150°/+350°) (SKF)

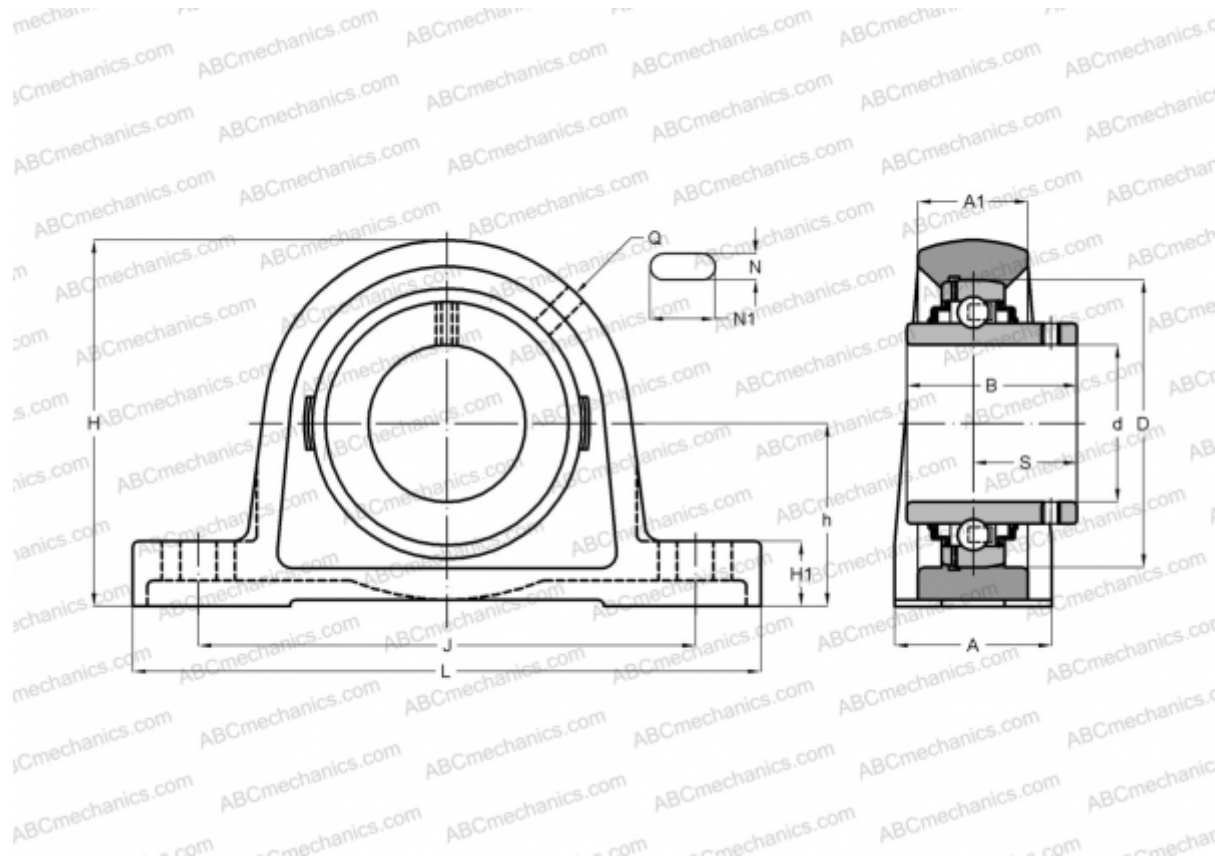

Technical specification

DIMENSIONS, MM

| | |
|----|---------|
| d | 20,000 |
| D | 47,000 |
| B | 31,000 |
| L | 127,000 |
| H | 64,000 |
| A | 32,000 |
| J | 97,000 |
| H1 | 14,000 |
| N | 11,500 |
| N1 | 20,500 |
| h | 33,300 |

WEIGHT, KG

0,570

Bearing

YAR 204-
2F/VA228

Housing

SY 504

MANUFACTURER

U/VA228

[SKF](#)

CALCULATION DATA

| | |
|------------------------------|-----------|
| Basic dynamic load rating, C | 12,700 kN |
| Basic static load rating, Co | 6,550 kN |
| Limiting speed | 260 r/min |
| Operating temperature max | 350 °C |