


SY 2. TF/VA228 SKF

Ball bearing units

TYPE: Housing units, Plummer block, Cast iron housing, Radial insert ball bearing with grub screws in inner ring, Type SY..TF/VA228, high temperature, for high demands, inch (-150°/+350°) (SKF)

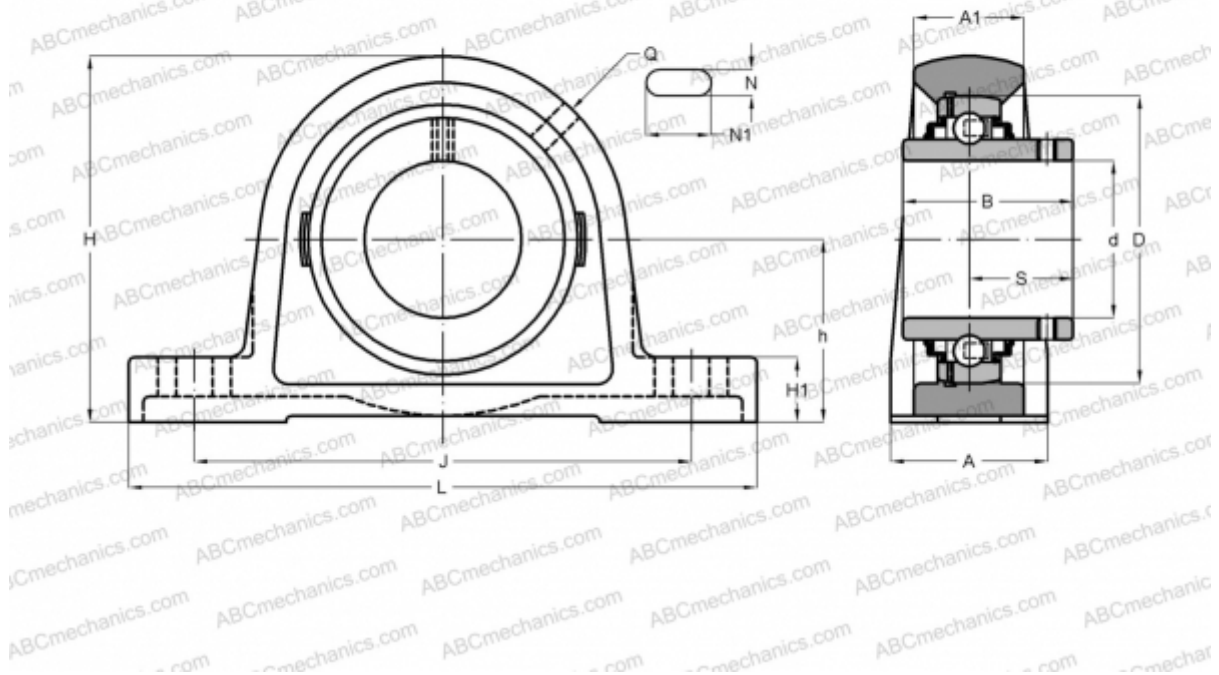

Technical specification

DIMENSIONS, MM

| | |
|----|---------|
| d | 50,800 |
| D | 100,000 |
| B | 55,600 |
| L | 219,000 |
| H | 127,000 |
| A | 60,000 |
| J | 171,500 |
| H1 | 23,800 |
| N | 18,000 |
| N1 | 27,500 |
| h | 63,500 |

WEIGHT, KG 3,600

Bearing YAR 211-200
2F/VA228

Housing SY 511

MANUFACTURER

U/VA228
[SKF](#)

CALCULATION DATA

| | |
|------------------------------|-----------|
| Basic dynamic load rating, C | 43,600 kN |
| Basic static load rating, Co | 29,000 kN |
| Limiting speed | 110 r/min |
| Operating temperature max | 350 °C |