
SY 2. TF/VA228 SKF

Ball bearing units

TYPE: Housing units, Plummer block, Cast iron housing, Radial insert ball bearing with grub screws in inner ring, Type SY..TF/VA228, high temperature, for high demands, inch (-150°/+350°) (SKF)

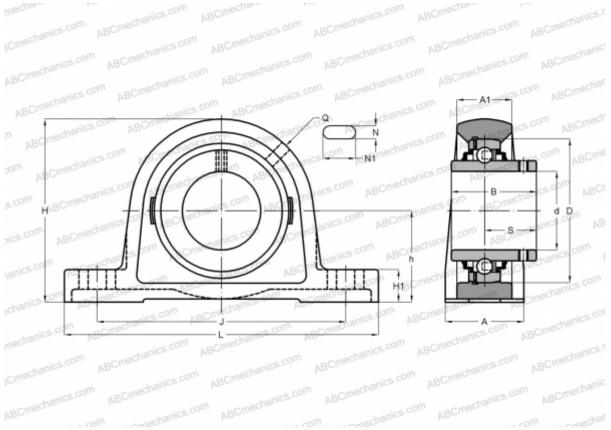

Limiting speed

Operating temperature max

Technical specification

| DIMENSIONS, MM | |
|----------------|-------------|
| d | 50,800 |
| D | 100,000 |
| В | 55,600 |
| L | 219,000 |
| н | 127,000 |
| A | 60,000 |
| J | 171,500 |
| H1 | 23,800 |
| Ν | 18,000 |
| N1 | 27,500 |
| h | 63,500 |
| WEIGHT, KG | 3,600 |
| Bearing | YAR 211-200 |
| | 2F/VA228 |

| Housing | SY 511 |
|------------------------------|-----------------------|
| MANUFACTURER | U/VA228 <u>SKF</u> |
| CALCULATION DATA | |
| Basic dynamic load rating, C | 43,600 kN |
| Basic static load rating, Co | 29,000 kN |

110 r/min 350 °C

