


PASE30-N INA

Ball bearing units

TYPE: Housing units, Plummer block, Cast iron housing, Radial insert ball bearing with eccentric locking collar, Type PASE (INA)

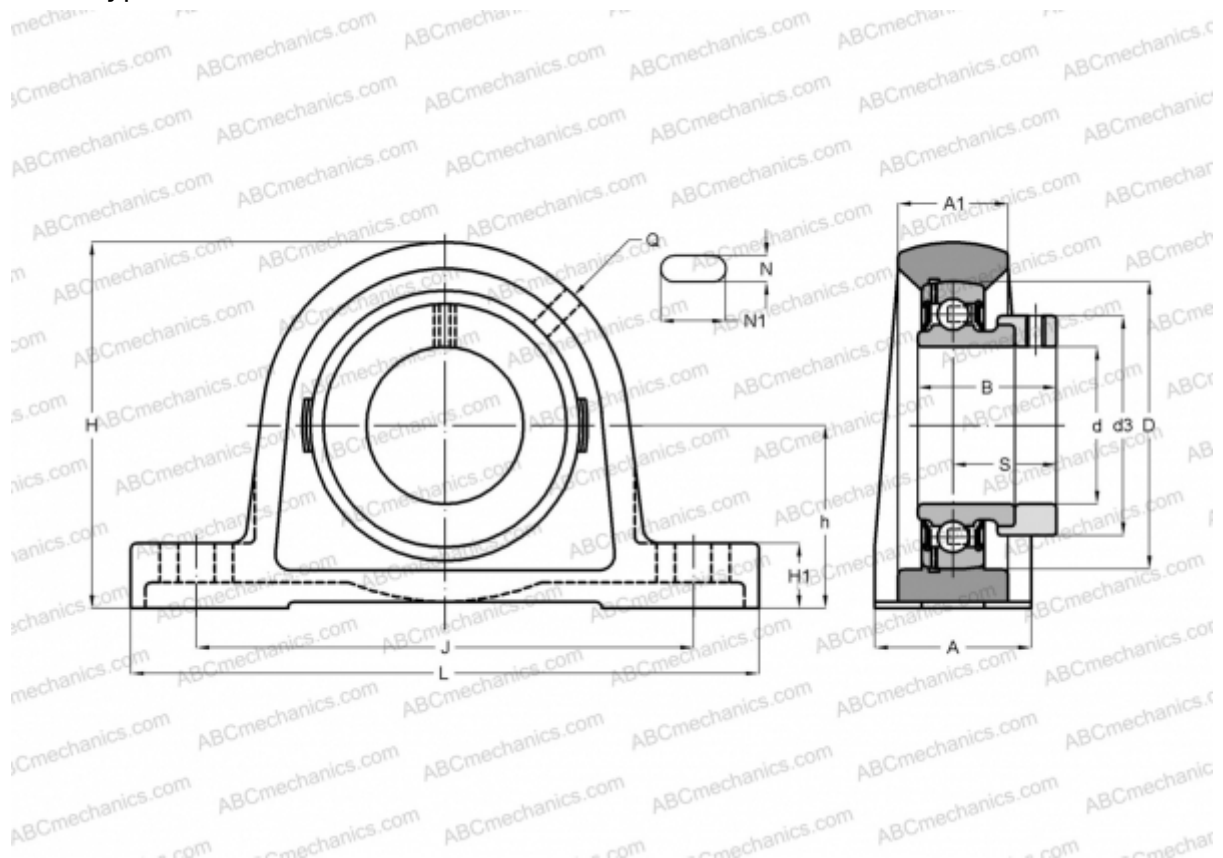

Technical specification

DIMENSIONS, MM

| | |
|----|---------|
| d | 30,000 |
| D | 62,000 |
| B | 35,800 |
| L | 158,000 |
| H | 82,000 |
| A | 40,000 |
| J | 118,000 |
| A1 | 25,000 |
| H1 | 17,000 |
| N | 14,000 |
| N1 | 22,000 |
| S | 26,800 |
| d3 | 44,000 |
| h | 42,900 |
| Q | Rp1/8 |

WEIGHT, KG

| | |
|------------------|--------------|
| | 1,130 |
| Bearing | GRAE30-NPP-B |
| Housing | GG.ASE06-N |
| Protective cover | KASK06 |

MANUFACTURER

[INA](#)

CALCULATION DATA

| | |
|------------------------------|-----------|
| Basic dynamic load rating, C | 19,500 kN |
| Basic static load rating, Co | 11,300 kN |