


## RASE30-N INA

Ball bearing units

TYPE: Housing units, Plummer block, Cast iron housing, Radial insert ball bearing with eccentric locking collar, Type RASE (INA)

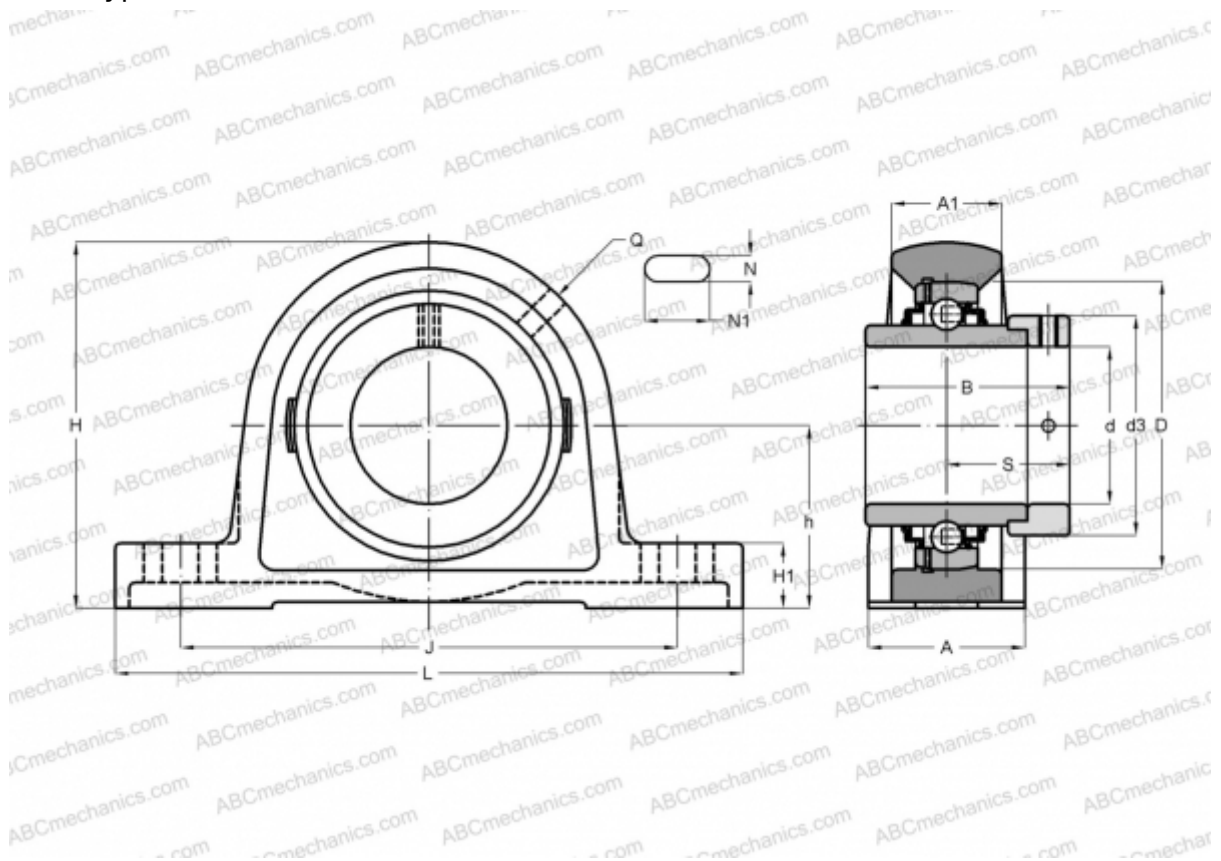

### Technical specification

#### DIMENSIONS, MM

|    |         |
|----|---------|
| d  | 30,000  |
| D  | 62,000  |
| B  | 48,500  |
| L  | 158,000 |
| H  | 82,000  |
| A  | 40,000  |
| J  | 118,000 |
| A1 | 25,000  |
| H1 | 17,000  |
| N  | 14,000  |
| N1 | 22,000  |
| S  | 30,200  |
| d3 | 44,000  |
| h  | 42,900  |
| Q  | Rp1/8   |

#### WEIGHT, KG

|                  |            |
|------------------|------------|
|                  | 1,110      |
| Bearing          | GE30-KRR-B |
| Housing          | GG.ASE06-N |
| Protective cover | KASK06     |

#### MANUFACTURER

[INA](#)

#### CALCULATION DATA

|                              |           |
|------------------------------|-----------|
| Basic dynamic load rating, C | 19,500 kN |
| Basic static load rating, Co | 11,300 kN |