


ABGounted bearings and housings

RASE50-FA164 INA

Ball bearing units

TYPE: Housing units, Plummer block, Cast iron housing, Radial insert ball bearing with eccentric locking collar, Type RASE (INA), for high temperatures (+250)

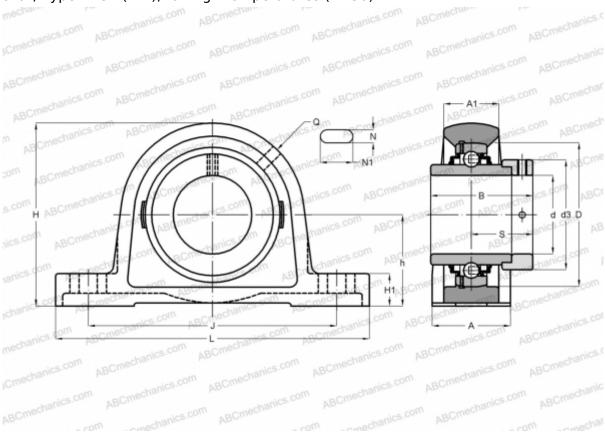

Technical specification

| DIMENSIONS, MM | |
|----------------|---------|
| d | 50,000 |
| D | 90,000 |
| В | 62,800 |
| L | 200,000 |
| Н | 115,000 |
| A | 54,000 |
| J | 158,000 |
| A1 | 34,000 |
| H1 | 21,500 |
| N | 18,000 |
| N1 | 23,000 |
| S | 38,200 |
| d3 | 69,000 |
| h | 57,200 |
| Q | Rp1/8 |

| WEIGHT, KG | 2,820 |
|------------------------------|-------------|
| Bearing | GE50-KRR-B- |
| Housing | GG.ASE10-N |
| MANUFACTURER | INA |
| CALCULATION DATA | |
| Basic dynamic load rating, C | 35,000 kN |
| Basic static load rating, Co | 23,200 kN |
| Operating temperature max | 250 °C |
| | |
| | |

