


Apgounted bearings and housings

RSAO30 INA

Ball bearing units

TYPE: Housing units, Plummer block, Cast iron housing, Radial insert ball bearing with eccentric locking collar, Type RSAO (INA)

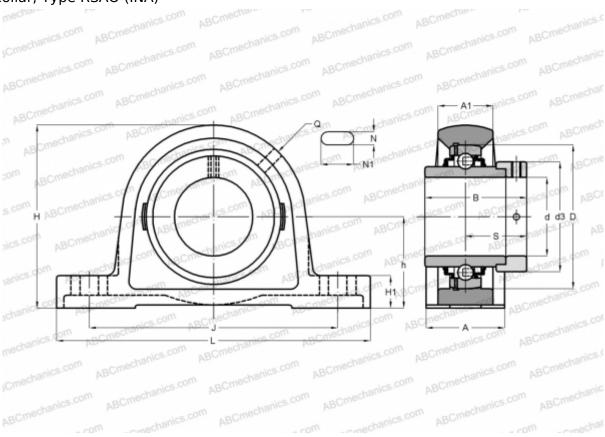

WEIGHT, KG

Technical specification

| DIMENSIONS, MM | |
|----------------|---------|
| d | 30,000 |
| D | 72,000 |
| В | 50,000 |
| L | 180,000 |
| Н | 95,000 |
| A | 50,000 |
| J | 140,000 |
| A1 | 28,000 |
| H1 | 18,000 |
| N | 17,500 |
| N1 | 20,500 |
| S | 32,500 |
| d3 | 51,000 |
| h | 50,000 |
| Q | Rp1/8 |

| , | _,-, |
|------------------------------|-------------|
| Bearing | GNE30-KRR-B |
| Housing | GG.SAO06 |
| MANUFACTURER | <u>INA</u> |
| CALCULATION DATA | |
| Basic dynamic load rating, C | 29,500 kN |
| Basic static load rating, Co | 16,700 kN |
| | |
| | |
| | |
| | |

1,800

