




RASEA50-N INA

Ball bearing units

TYPE: Housing units, Plummer block, Cast iron housing, Radial insert ball bearing with adapter sleeve,
Type RASEA (INA)

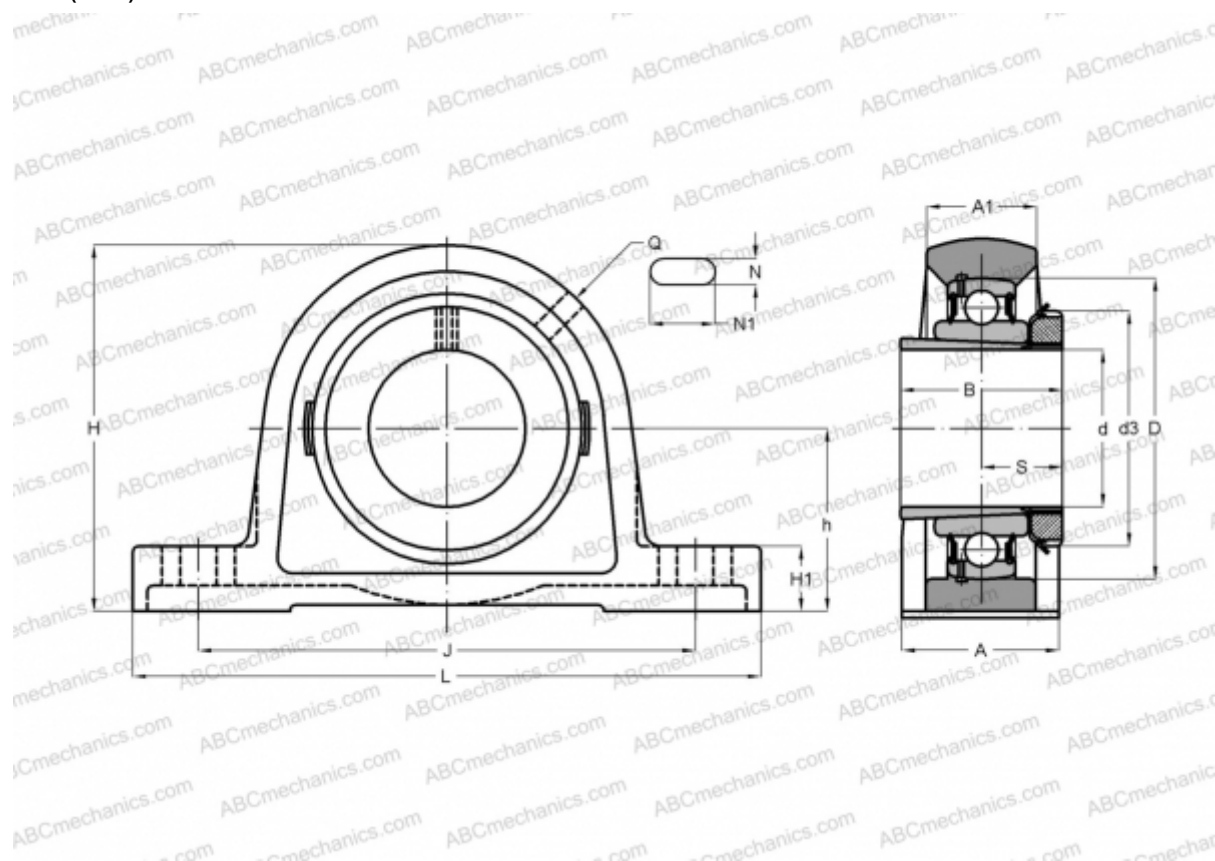

Technical specification

DIMENSIONS, MM

| | |
|----|---------|
| d | 50,000 |
| D | 90,000 |
| B | 40,000 |
| L | 200,000 |
| H | 115,000 |
| A | 54,000 |
| J | 158,000 |
| A1 | 34,000 |
| H1 | 21,500 |
| N | 18,000 |
| N1 | 23,000 |
| d3 | 70,000 |
| h | 57,200 |
| Q | Rp1/8 |

WEIGHT, KG

2,090

| | |
|------------------|--------------|
| Bearing | GSH50-2RSR-B |
| Housing | GG.ASE10-N |
| Protective cover | KASK10 |

MANUFACTURER

[INA](#)

CALCULATION DATA

| | |
|------------------------------|-----------|
| Basic dynamic load rating, C | 33,000 kN |
| Basic static load rating, Co | 19,900 kN |

