




## PCJT20-N INA

Ball bearing units

TYPE: Housing units, Two-bolt flanged housing units, Cast iron housing, Radial insert ball bearing with eccentric locking collar, Type PCJT (INA)

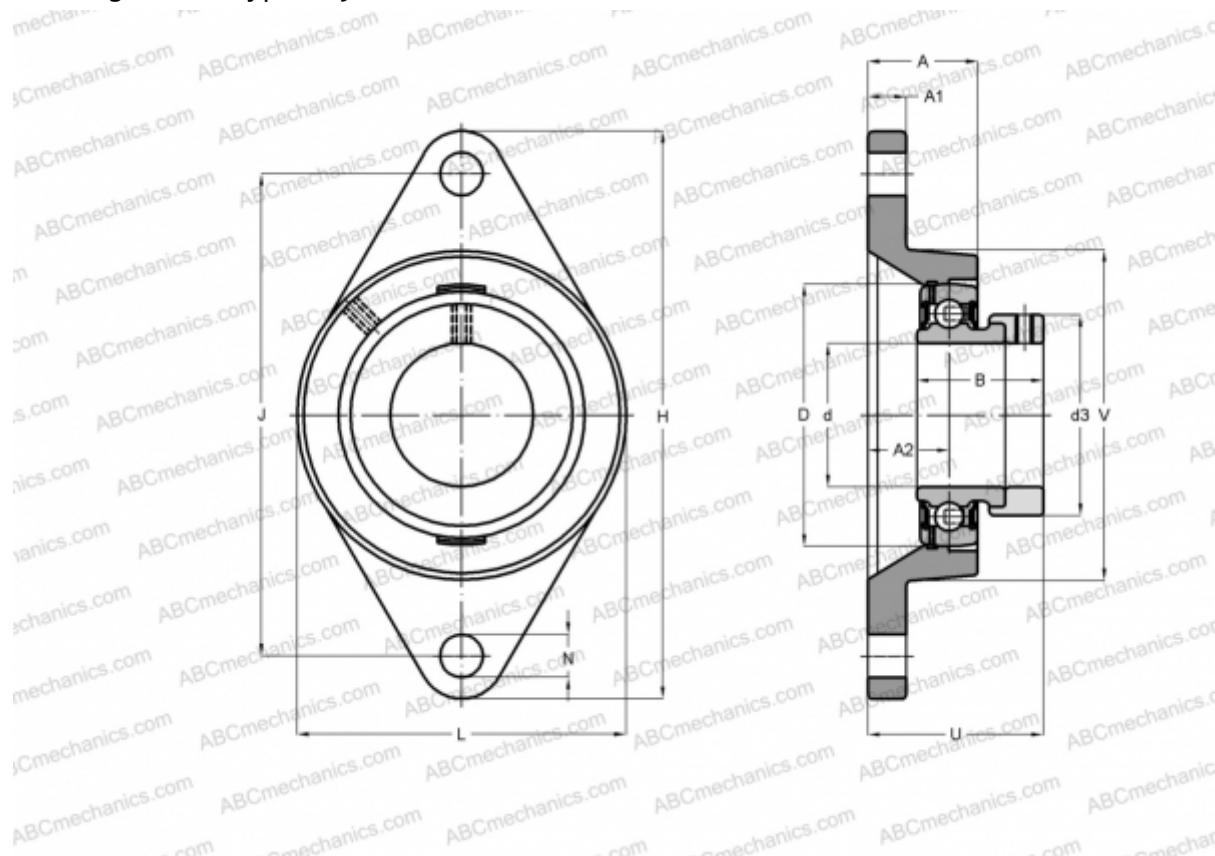

### Technical specification

#### DIMENSIONS, MM

|    |         |
|----|---------|
| d  | 20,000  |
| D  | 47,000  |
| B  | 31,000  |
| L  | 61,000  |
| H  | 112,000 |
| A  | 28,000  |
| J  | 90,000  |
| A1 | 10,000  |
| A2 | 19,000  |
| N  | 11,500  |
| d3 | 33,000  |
| U  | 42,500  |
| V  | 61,000  |
| Q  | Rp1/8   |

#### WEIGHT, KG

0,480

|                  |              |
|------------------|--------------|
| Bearing          | GRAE20-NPP-B |
| Housing          | GG.CJT04-N   |
| Protective cover | KASK04       |

#### MANUFACTURER

[INA](#)

#### CALCULATION DATA

|                              |           |
|------------------------------|-----------|
| Basic dynamic load rating, C | 12,800 kN |
| Basic static load rating, Co | 6,600 kN  |