


## Apgounted bearings and housings

## **PCJT20-N INA**

Ball bearing units

TYPE: Housing units, Two-bolt flanged housing units, Cast iron housing, Radial insert ball bearing with eccentric locking collar, Type PCJT (INA)

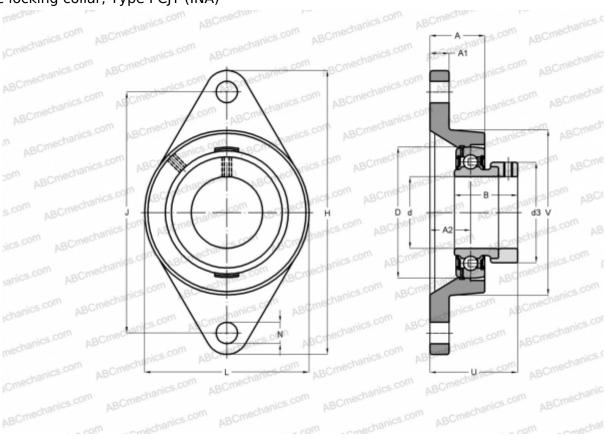

## **Technical specification**

| DIMENSIONS, MM |         |
|----------------|---------|
| d              | 20,000  |
| D              | 47,000  |
| В              | 31,000  |
| L              | 61,000  |
| Н              | 112,000 |
| A              | 28,000  |
| J              | 90,000  |
| A1             | 10,000  |
| A2             | 19,000  |
| N              | 11,500  |
| d3             | 33,000  |
| U              | 42,500  |
| V              | 61,000  |
| Q              | Rp1/8   |

| WEIGHT, KG                   | 0,480        |
|------------------------------|--------------|
| Bearing                      | GRAE20-NPP-B |
| Housing                      | GG.CJT04-N   |
| Protective cover             | KASK04       |
| MANUFACTURER                 | INA          |
| CALCULATION DATA             |              |
| Basic dynamic load rating, C | 12,800 kN    |
| Basic static load rating, Co | 6,600 kN     |

