




## PCJT25-N INA

Ball bearing units

TYPE: Housing units, Two-bolt flanged housing units, Cast iron housing, Radial insert ball bearing with eccentric locking collar, Type PCJT (INA)

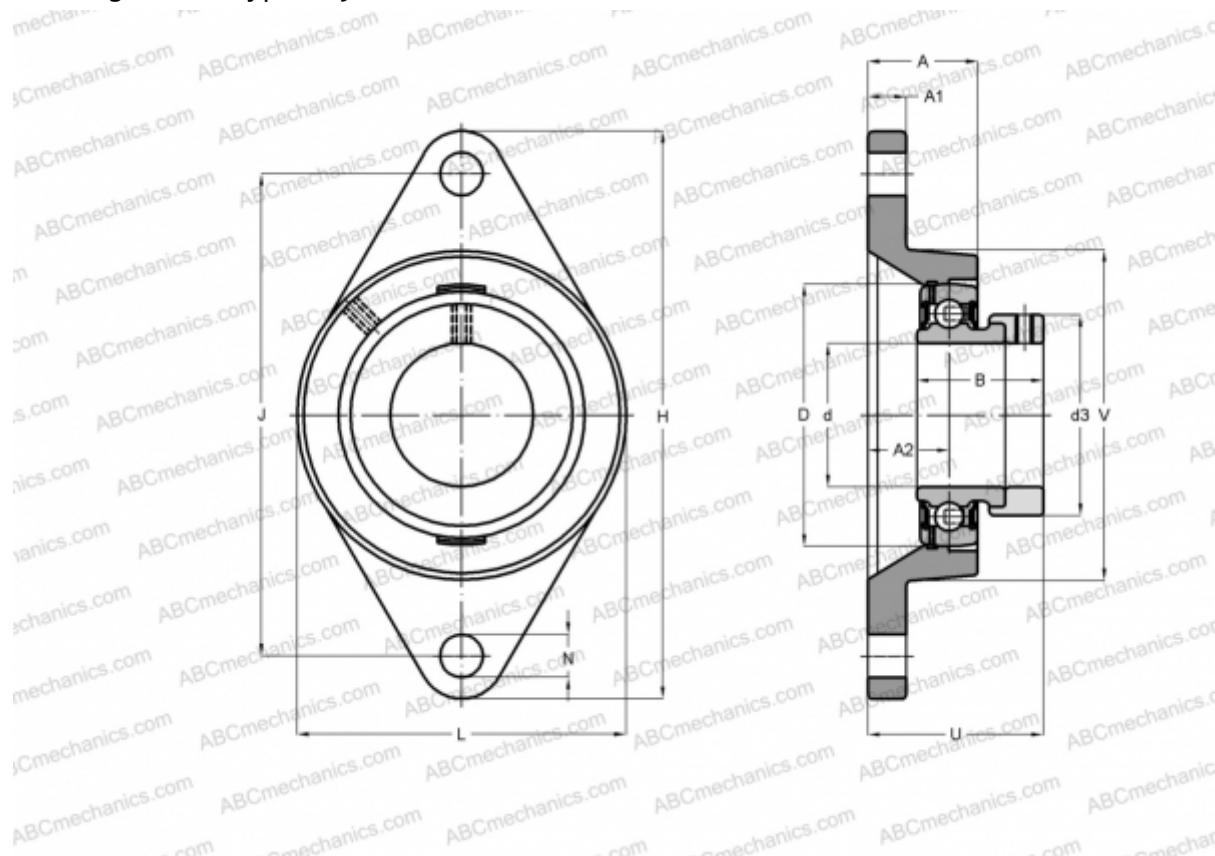

### Technical specification

#### DIMENSIONS, MM

|    |         |
|----|---------|
| d  | 25,000  |
| D  | 52,000  |
| B  | 31,000  |
| L  | 70,000  |
| H  | 124,000 |
| A  | 26,500  |
| J  | 99,000  |
| A1 | 11,000  |
| A2 | 19,000  |
| N  | 11,500  |
| d3 | 37,500  |
| U  | 42,500  |
| V  | 70,000  |
| Q  | Rp1/8   |

#### WEIGHT, KG

0,580

|                  |              |
|------------------|--------------|
| Bearing          | GRAE25-NPP-B |
| Housing          | GG.CJT05-N   |
| Protective cover | KASK05       |

#### MANUFACTURER

[INA](#)

#### CALCULATION DATA

|                              |           |
|------------------------------|-----------|
| Basic dynamic load rating, C | 14,000 kN |
| Basic static load rating, Co | 7,800 kN  |