


## Applounted bearings and housings

## PCJT25-N-FA125 INA

Ball bearing units

TYPE: Housing units, Two-bolt flanged housing units, Cast iron housing, Radial insert ball bearing with eccentric locking collar, Type PCJT (INA), coated with CORROTECT

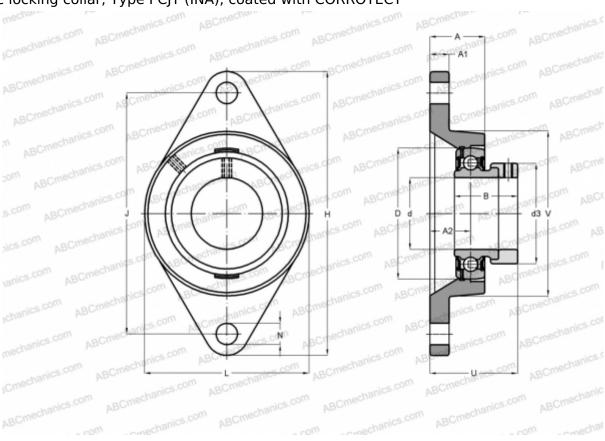

## **Technical specification**

DIMENSIONS, MM	
d	25,000
D	52,000
В	31,000
L	70,000
Н	124,000
A	26,500
J	99,000
A1	11,000
A2	19,000
N	11,500
d3	37,500
U	42,500
V	70,000
Q	Rp1/8

WEIGHT, KG	0,560
Bearing	GRAE25-NPP-B-
Housing	GG.CJT05-N-
Protective cover	FK4A152K50 \$
MANUFACTURER	INA
CALCULATION DATA	
Basic dynamic load rating, C	14,000 kN
Basic static load rating, Co	7,800 kN

