


Almounted bearings and housings

RRY12-VA INA

Ball bearing units

TYPE: Housing units, Three/four-bolt flanged housing units, Sheet steel housing, Radial insert ball bearing with grub screws in inner ring, Anti-corrosion protection, without relubrication facility, type RRY..-VA (INA)

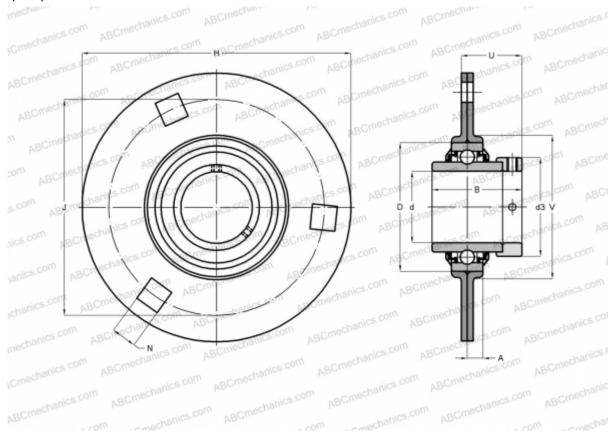

Technical specification

| DIMENSIONS, MM | |
|----------------|--------------|
| d | 12,000 |
| D | 40,000 |
| В | 25,000 |
| Н | 81,000 |
| A | 7,000 |
| J | 63,500 |
| N | 7,100 |
| U | 17,400 |
| V | 48,000 |
| WEIGHT, KG | 0,210 |
| Bearing | GYE12-KRR-B- |
| Housing | FLAN40-MSB- |
| | VA x 2 |

| MANUFACTURER | <u>INA</u> |
|------------------------------|------------|
| CALCULATION DATA | |
| Basic dynamic load rating, C | 9,800 kN |
| Basic static load rating, Co | 4,750 kN |
| | |

