


## Apgounted bearings and housings

## RCJ25-FA164 INA

Ball bearing units

TYPE: Housing units, Four-bolt flanged housing units, Cast iron housing, Radial insert ball bearing with eccentric locking collar, Type RCJ (INA), for high temperatures (+250)

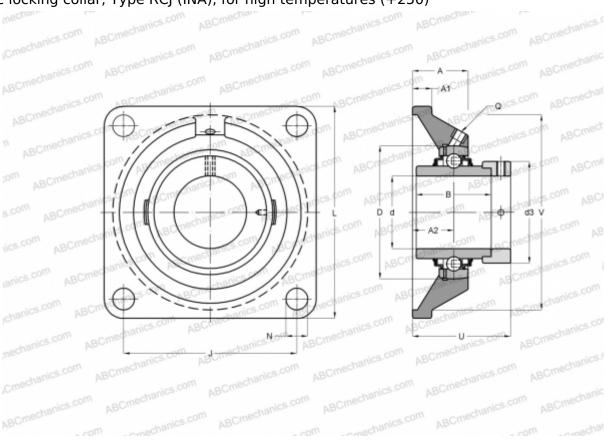

## **Technical specification**

d 25,000 D 52,000 B 44,500 L 95,000 A 29,000 J 70,000 A1 11,000 A2 19,000 N 11,500 d3 37,500 U 46,000
B 44,500 L 95,000 A 29,000 J 70,000 A1 11,000 A2 19,000 N 11,500 d3 37,500
L 95,000 A 29,000 J 70,000 A1 11,000 A2 19,000 N 11,500 d3 37,500
A 29,000 J 70,000 A1 11,000 A2 19,000 N 11,500 d3 37,500
J       70,000         A1       11,000         A2       19,000         N       11,500         d3       37,500
A1 11,000 A2 19,000 N 11,500 d3 37,500
A2 19,000 N 11,500 d3 37,500
N 11,500 d3 37,500
d3 37,500
·
46,000
U 46,000
V 74,000
Q Rp1/8
WEIGHT, KG 0.820

Bearing	GE25-KRR-B-
Housing	GG.CJ05-N
MANUFACTURER	INA
CALCULATION DATA	
Basic dynamic load rating, C	14,000 kN
Basic static load rating, Co	7,800 kN
Operating temperature max	250 °C

