


Almounted bearings and housings

PME60-N INA

Ball bearing units

TYPE: Housing units, Four-bolt flanged housing units, Cast iron housing, Radial insert ball bearing with eccentric locking collar, Centring spigot, type PME (INA)

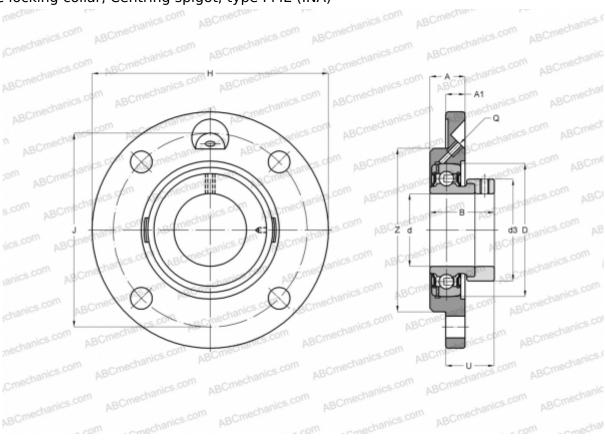

Technical specification

DIMENSIONS, MM	
d	60,000
D	110,000
В	53,100
Н	195,000
A	29,000
J	160,000
A1	16,000
N	18,000
d3	84,000
U	38,600
Z	135,000
Q	Rp1/8
WEIGHT. KG	3,650

Bearing	GRAE60-NPP-B
Housing	GG.ME12-N
Protective cover	KASK12
MANUFACTURER	INA
CALCULATION DATA	
Basic dynamic load rating, C	52,000 kN
Basic static load rating, Co	36,000 kN

