


Almounted bearings and housings

RME25-N INA

Ball bearing units

TYPE: Housing units, Four-bolt flanged housing units, Cast iron housing, Radial insert ball bearing with eccentric locking collar, Centring spigot, type RME (INA)

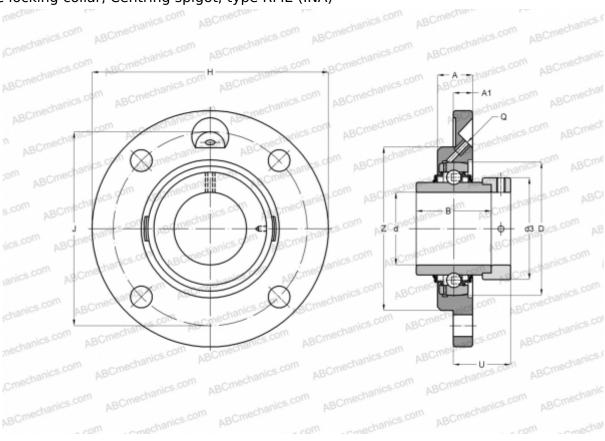

Bearing

Technical specification

DIMENSIONS, MM	
d	25,000
D	52,000
В	44,500
Н	115,000
Α	19,000
J	90,000
A1	9,000
N	9,000
d3	37,500
U	24,400
Z	70,000
Q	М6
WEIGHT, KG	0.800

Dearing	GL25-KIKIK-D
Housing	GG.ME05-N
Protective cover	KASK05
MANUFACTURER	INA
CALCULATION DATA	
Basic dynamic load rating, C	14,000 kN
Basic dynamic load rating, C Basic static load rating, Co	14,000 kN 7,800 kN

GF25-KRR-B

