


## Almounted bearings and housings

## **RME50-N INA**

Ball bearing units

TYPE: Housing units, Four-bolt flanged housing units, Cast iron housing, Radial insert ball bearing with eccentric locking collar, Centring spigot, type RME (INA)

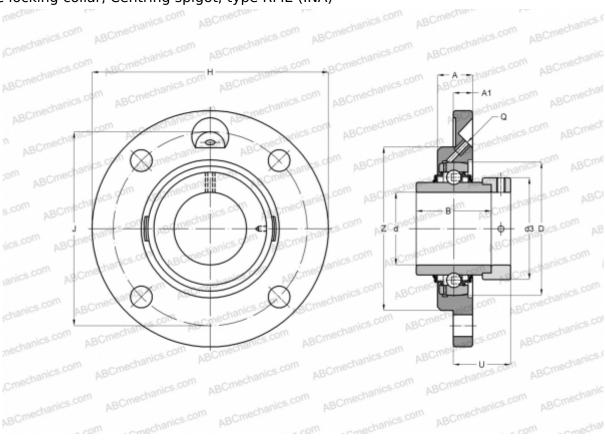

**Bearing** 

## **Technical specification**

DIMENSIONS, MM	
d	50,000
D	90,000
В	62,800
Н	165,000
A	25,000
J	135,000
A1	13,000
N	14,000
d3	69,000
U	37,100
Z	110,000
Q	M8X1
WEIGHT, KG	2 530

Housing	GG.ME10-N
Protective cover	KASK10
MANUFACTURER	INA
CALCULATION DATA	
Basic dynamic load rating, C	35,000 kN
Basic static load rating, Co	23,200 kN

GE50-KRR-B

