


# RME90 INA

Ball bearing units

TYPE: Housing units, Four-bolt flanged housing units, Cast iron housing, Radial insert ball bearing with eccentric locking collar, Centring spigot, type RME (INA)

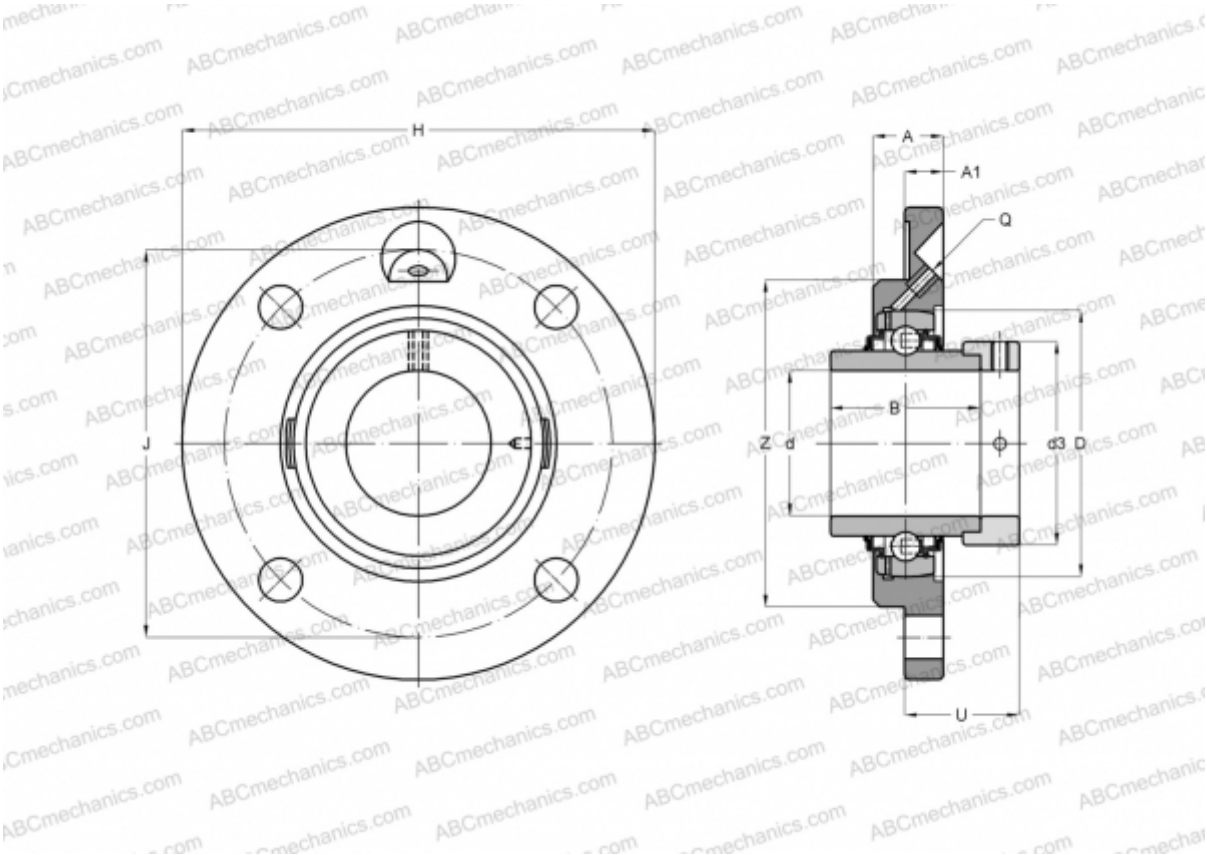

## Technical specification

### DIMENSIONS, MM

|    |         |
|----|---------|
| d  | 90,000  |
| D  | 160,000 |
| B  | 69,500  |
| H  | 265,000 |
| A  | 32,000  |
| J  | 220,000 |
| A1 | 20,000  |
| N  | 23,000  |
| d3 | 118,000 |
| U  | 50,500  |
| Z  | 190,000 |
| Q  | Rp1/8   |

WEIGHT, KG 8,500

|         |            |
|---------|------------|
| Bearing | GE90-KRR-B |
| Housing | GG.ME18    |

MANUFACTURER [INA](#)

### CALCULATION DATA

|                              |           |
|------------------------------|-----------|
| Basic dynamic load rating, C | 96,000 kN |
| Basic static load rating, Co | 72,000 kN |