


ABGounted bearings and housings

RMEO40 INA

Ball bearing units

TYPE: Housing units, Four-bolt flanged housing units, Cast iron housing, Radial insert ball bearing with eccentric locking collar, Centring spigot, type RMEO (INA)

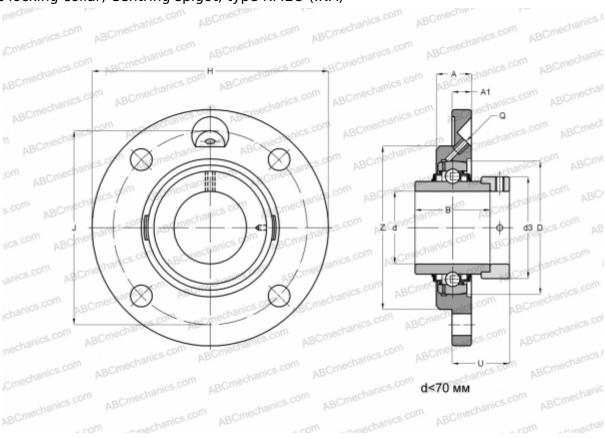

Technical specification

DIMENSIONS, MM	
d	40,000
D	90,000
В	54,600
Н	194,000
A	27,000
J	158,000
A1	17,000
N	19,000
d3	63,000
U	39,100
Z	115,000
Q	М6
WEIGHT, KG	3 400

Bearing	GNE40-KRR-B
Housing	GG.MEO08
MANUFACTURER CALCULATION DATA	INA
Basic dynamic load rating, C	44,500 kN
Basic static load rating, Co	26,000 kN

