




TME20-N INA

Ball bearing units

TYPE: Housing units, Four-bolt flanged housing units, Cast iron housing, Radial insert ball bearing with eccentric locking collar, Centring spigot, type TME (INA)

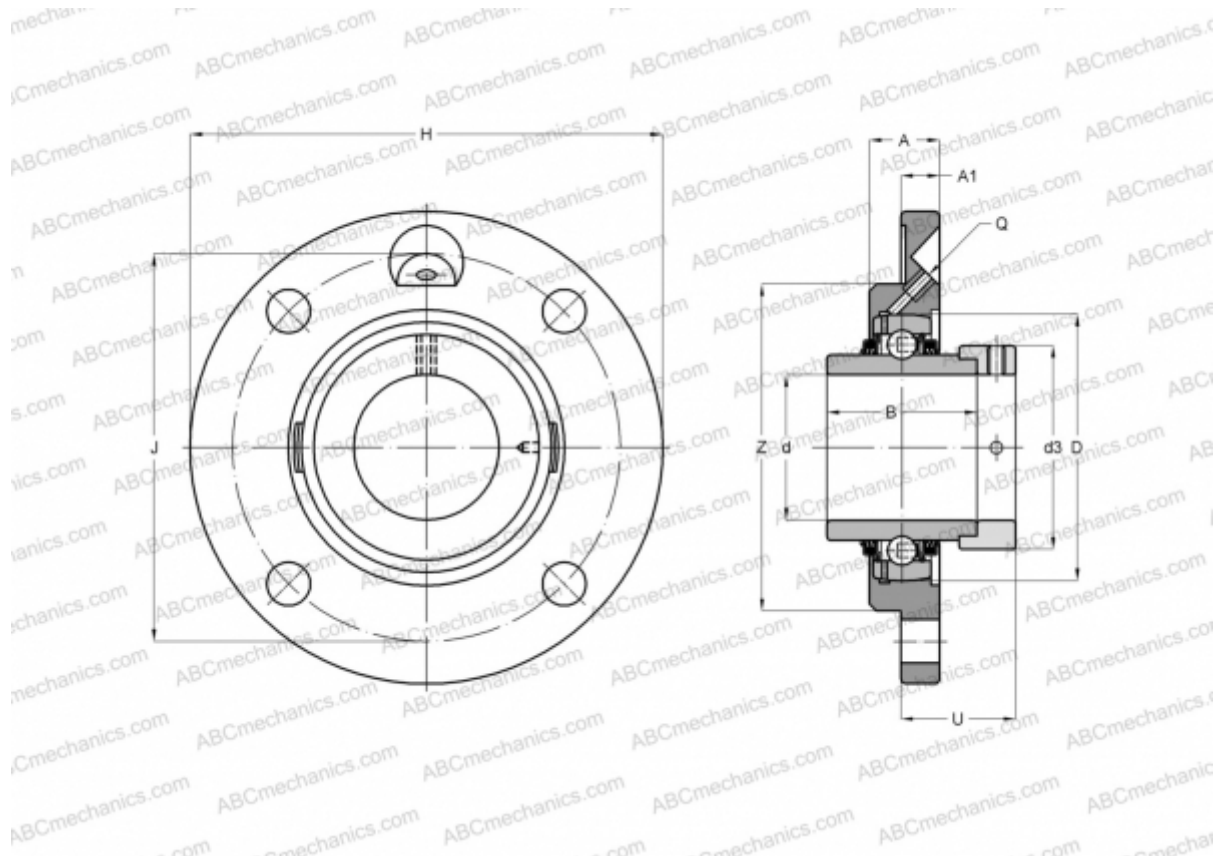

Technical specification

DIMENSIONS, MM

| | |
|----|---------|
| d | 20,000 |
| D | 47,000 |
| B | 43,700 |
| H | 100,000 |
| A | 17,000 |
| J | 78,000 |
| A1 | 8,000 |
| N | 9,000 |
| d3 | 33,000 |
| U | 24,600 |
| Z | 62,000 |
| Q | M6 |

WEIGHT, KG 0,560

| | |
|------------------|------------|
| Bearing | GE20-KTT-B |
| Housing | GG.ME04-N |
| Protective cover | KASK04 |

MANUFACTURER

[INA](#)

CALCULATION DATA

| | |
|------------------------------|-----------|
| Basic dynamic load rating, C | 12,800 kN |
| Basic static load rating, Co | 6,600 kN |