


ABGounted bearings and housings

RFE30 INA

Ball bearing units

TYPE: Housing units, Four-bolt flanged housing units, Cast iron housing, Radial insert ball bearing with eccentric locking collar, Centring spigot, type RFE (INA)

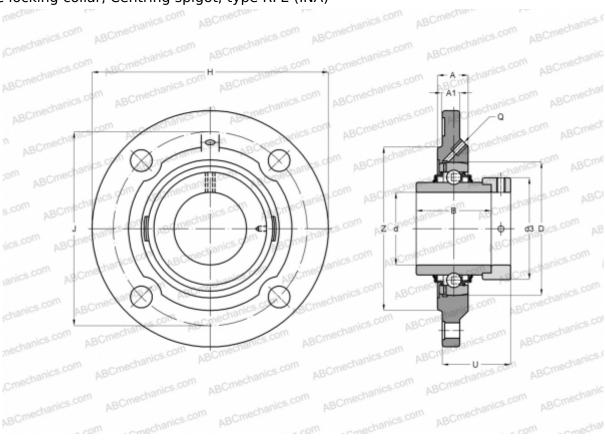

Technical specification

DIMENSIONS, MM	
d	30,000
D	62,000
В	48,500
Н	127,000
A	22,500
J	105,000
A1	9,500
N	9,000
d3	44,000
U	40,600
Z	85,000
Q	Rp1/8
WEIGHT. KG	1.080

Bearing	GE30-KRR-B
Housing	GG.FE06
MANUFACTURER	INA
CALCULATION DATA	
Basic dynamic load rating, C	19,500 kN
Basic static load rating, Co	11,300 kN

