
## **RTUE20 INA**

## Ball bearing units

TYPE: Housing units, Take-up housing units, Cast iron housing, Radial insert ball bearing with eccentric locking collar, Type RTUE (INA)

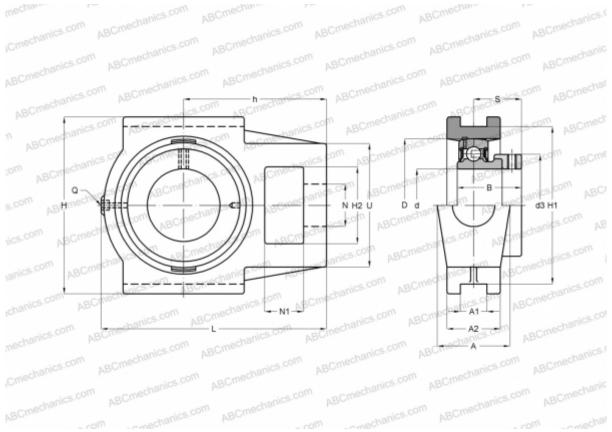

## **Technical specification**

| DIMENSIONS, MM |        |
|----------------|--------|
| d              | 20,000 |
| D              | 47,000 |
| В              | 43,700 |
| L              | 94,500 |
| н              | 90,000 |
| A              | 37,000 |
| H2             | 32,000 |
| A1             | 12,000 |
| A2             | 25,000 |
| H1             | 76,000 |
| Ν              | 19,000 |
| N1             | 18,000 |
| S              | 26,600 |
| d3             | 33,000 |
| U              | 51,000 |

## **DIMENSIONS, MM**

| h                            | 60,000     |
|------------------------------|------------|
| Q                            | Rp1/8      |
| WEIGHT, KG                   | 0,900      |
| Bearing                      | GE20-KRR-B |
| Housing                      | GG.TUE04   |
|                              | INA        |
| CALCULATION DATA             |            |
| Basic dynamic load rating, C | 12,800 kN  |
| Basic static load rating, Co | 6,600 kN   |

