




## RTUE75 INA

Ball bearing units

TYPE: Housing units, Take-up housing units, Cast iron housing, Radial insert ball bearing with eccentric locking collar, Type RTUE (INA)

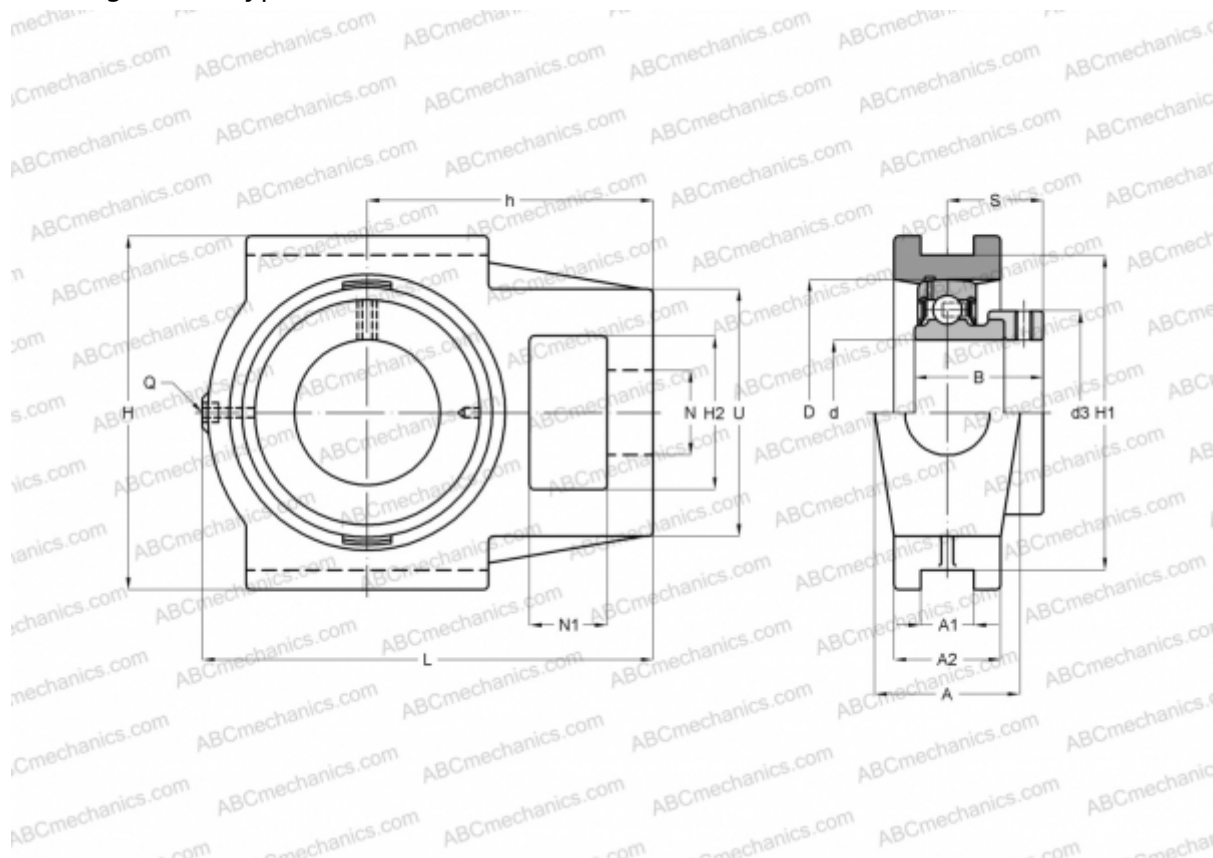

### Technical specification

#### DIMENSIONS, MM

|    |         |
|----|---------|
| d  | 75,000  |
| D  | 130,000 |
| B  | 67,000  |
| L  | 214,000 |
| H  | 166,000 |
| A  | 70,000  |
| H2 | 70,000  |
| A1 | 25,000  |
| A2 | 50,000  |
| H1 | 151,000 |
| N  | 41,000  |
| N1 | 35,000  |
| S  | 45,500  |
| d3 | 100,000 |
| U  | 110,000 |

#### DIMENSIONS, MM

|   |         |
|---|---------|
| h | 135,000 |
| Q | Rp1/8   |

#### WEIGHT, KG

|         |            |
|---------|------------|
| Bearing | GE75-KRR-B |
| Housing | GG.TUE15   |

#### MANUFACTURER

[INA](#)

#### CALCULATION DATA

|                              |           |
|------------------------------|-----------|
| Basic dynamic load rating, C | 62,000 kN |
| Basic static load rating, Co | 44,500 kN |