


## EXP202 SNR

Ball bearing units

TYPE: Housing units, Plummer block, Cast iron housing, Radial insert ball bearing with eccentric locking collar, With inner ring extended on both sides, massive bearing units

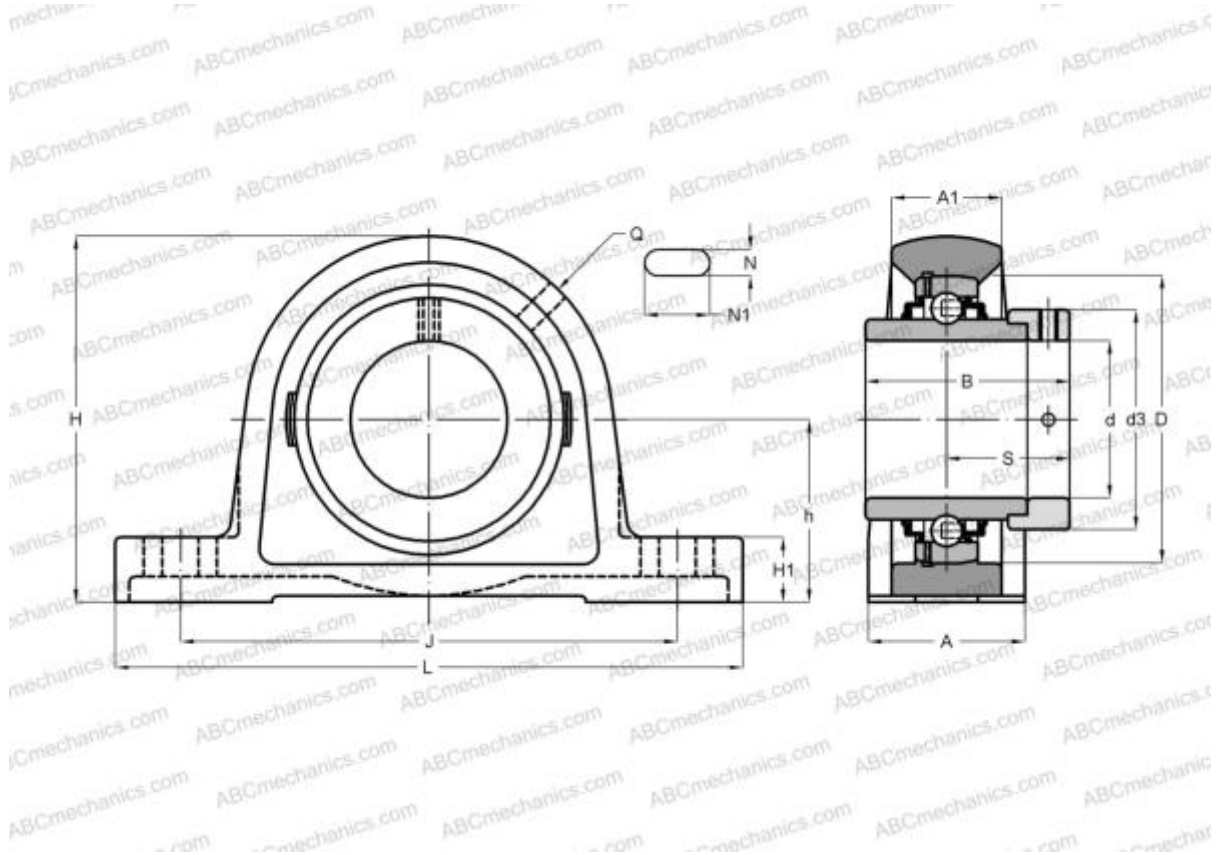

### Technical specification

#### DIMENSIONS, MM

|    |         |
|----|---------|
| d  | 15,000  |
| D  | 47,000  |
| L  | 127,000 |
| H  | 65,000  |
| A  | 22,000  |
| J  | 95,000  |
| A1 | 38,000  |
| H1 | 15,000  |
| N  | 13,000  |
| N1 | 19,000  |
| S  | 26,500  |
| d3 | 33,300  |
| h  | 33,300  |
| Q  | M6x1    |

#### WEIGHT, KG

|         |       |
|---------|-------|
|         | 0,800 |
| Bearing | EX202 |
| Housing | P204  |

#### MANUFACTURER

[SNR](#)

#### INTERCHANGE

|     |                        |
|-----|------------------------|
| ABC | <a href="#">EXP202</a> |
|-----|------------------------|

#### CALCULATION DATA

|                              |           |
|------------------------------|-----------|
| Basic dynamic load rating, C | 12,800 kN |
| Basic static load rating, Co | 6,650 kN  |
| Operating temperature min    | -20 °C    |
| Operating temperature max    | 110 °C    |