


SYJ 40 KF SKF

Ball bearing units

TYPE: Housing units, Plummer block, Cast iron housing, Radial insert ball bearing with adapter sleeve, With inner ring extended on both sides

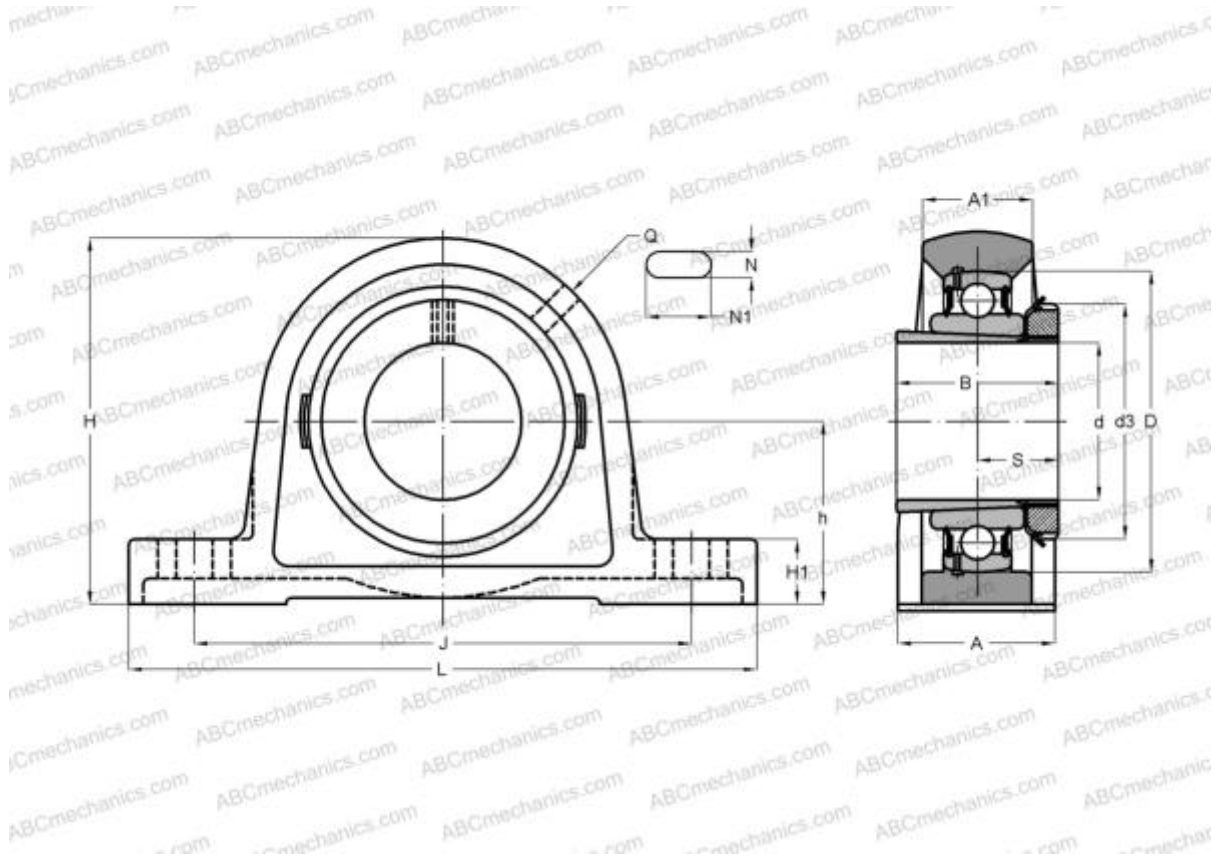

Technical specification

DIMENSIONS, MM

| | |
|----|---------|
| d | 35,000 |
| D | 80,000 |
| B | 46,000 |
| L | 184,000 |
| H | 99,000 |
| A | 49,000 |
| J | 136,500 |
| A1 | 31,000 |
| H1 | 18,000 |
| N | 17,000 |
| N1 | 25,500 |
| S | 27,000 |
| h | 49,200 |

WEIGHT, KG 1,800

| | |
|----------------|-------------|
| Bearing | YSA 208-2FK |
| Housing | SYJ 508 |
| Adapter sleeve | H 2308 |

MANUFACTURER

[SKF](#)

INTERCHANGE

| | |
|-----|--------------------------|
| ABC | UKPE208H |
| SNR | UKPE208H |

CALCULATION DATA

| | |
|------------------------------|------------|
| Basic dynamic load rating, C | 30,700 kN |
| Basic static load rating, Co | 19,000 kN |
| Fatigue load limit, Pu | 0,800 kN |
| Limiting speed | 4800 r/min |