


## UKFLZ207H SNR

Ball bearing units

TYPE: Housing units, Two-bolt flanged housing units, Cast iron housing, Radial insert ball bearing with adapter sleeve, With inner ring extended on both sides, with centring rim

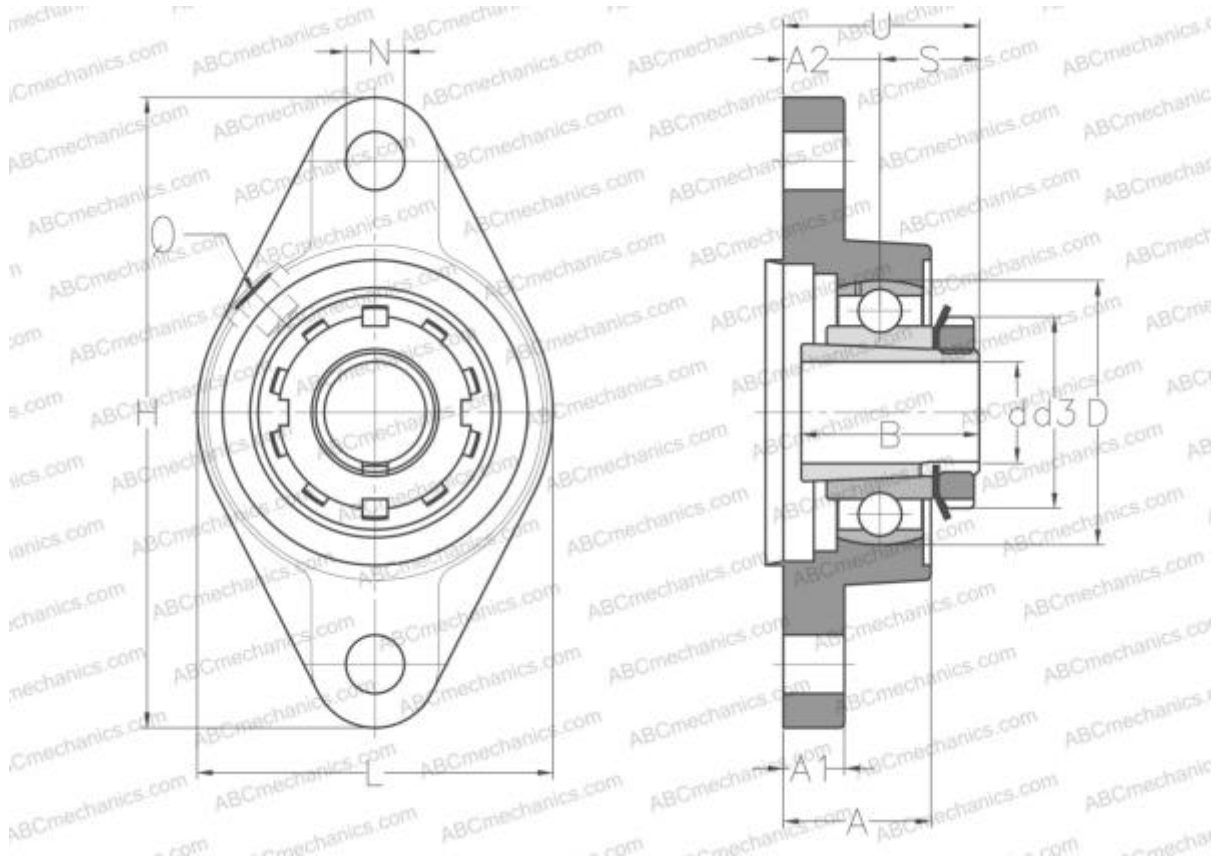

### Technical specification

#### DIMENSIONS, MM

|    |         |
|----|---------|
| d  | 30,000  |
| D  | 72,000  |
| B  | 43,000  |
| L  | 94,000  |
| H  | 155,000 |
| A  | 32,500  |
| J  | 130,000 |
| A1 | 12,500  |
| A2 | 17,000  |
| N  | 14,000  |
| d3 | 52,000  |
| U  | 39,500  |
| Z  | 90,000  |
| Q  | R1/8"   |

#### WEIGHT, KG

|                |         |
|----------------|---------|
|                | 1,200   |
| Bearing        | UK207 + |
| Housing        | FLZ207  |
| Adapter sleeve | H2307   |

#### MANUFACTURER

[SNR](#)

#### INTERCHANGE

|     |                           |
|-----|---------------------------|
| ABC | <a href="#">UKFLZ207H</a> |
|-----|---------------------------|

#### CALCULATION DATA

|                              |           |
|------------------------------|-----------|
| Basic dynamic load rating, C | 25,700 kN |
| Basic static load rating, Co | 15,200 kN |
| Operating temperature min    | -20 °C    |
| Operating temperature max    | 110 °C    |