


## PSFT20 INA

Ball bearing units

TYPE: Housing units, Take-up housing units, Cast iron housing, Radial insert ball bearing with eccentric locking collar, With inner ring extended at one side

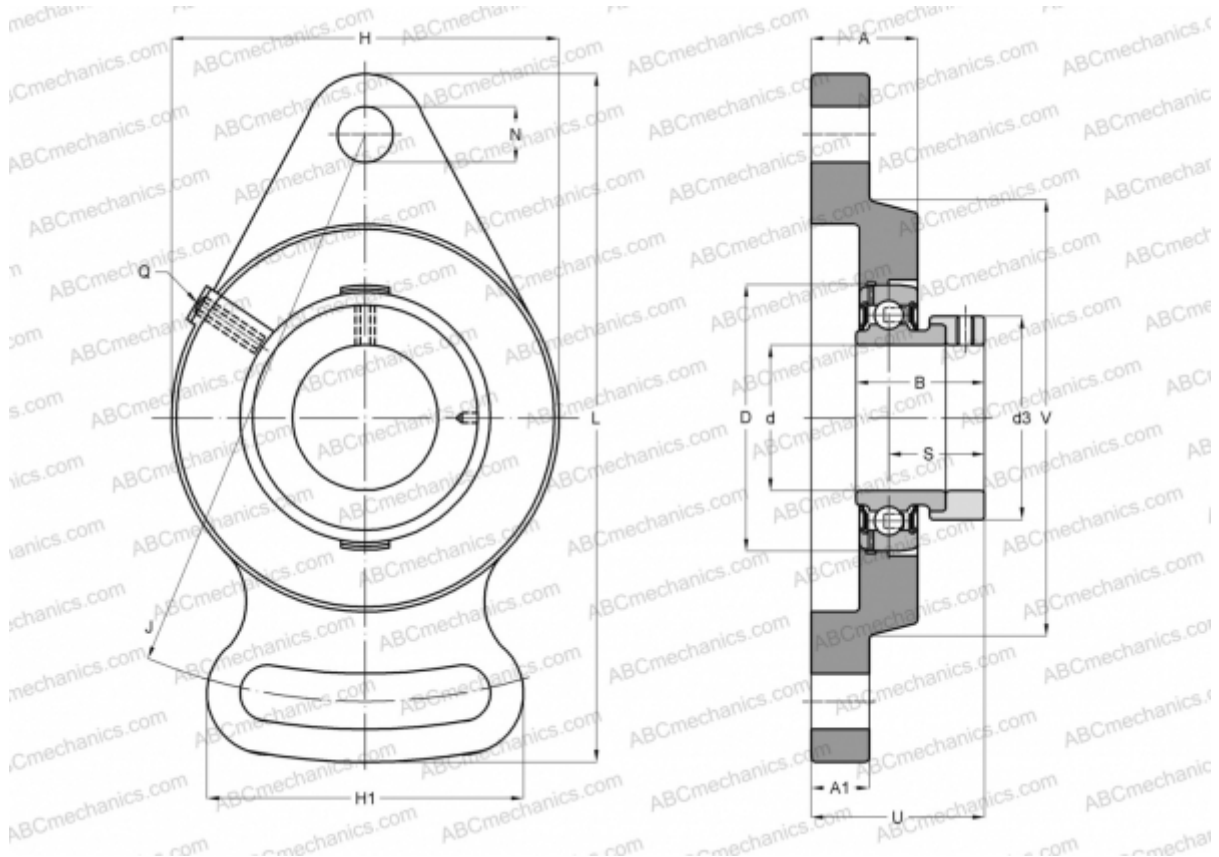

### Technical specification

#### DIMENSIONS, MM

d	20,000
D	47,000
B	31,000
L	112,000
H	61,000
A	18,000
J	90,000
A1	10,000
H1	52,000
N	11,500
d3	33,000
U	34,000
Q	Rp1/8

**WEIGHT, KG** 0,410

Bearing	GRAE20-NPP-B
Housing	GG.SFT04

#### MANUFACTURER

[INA](#)

#### INTERCHANGE

ABC	<a href="#">ESFAE204</a>
SNR	<a href="#">ESFAE204</a>

#### CALCULATION DATA

Basic dynamic load rating, C	12,800 kN
Basic static load rating, Co	6,600 kN