


UKT306H SNR

Ball bearing units

TYPE: Housing units, Take-up housing units, Cast iron housing, With inner ring extended on both sides, for tensioning frame, Radial insert ball bearing with adapter sleeve

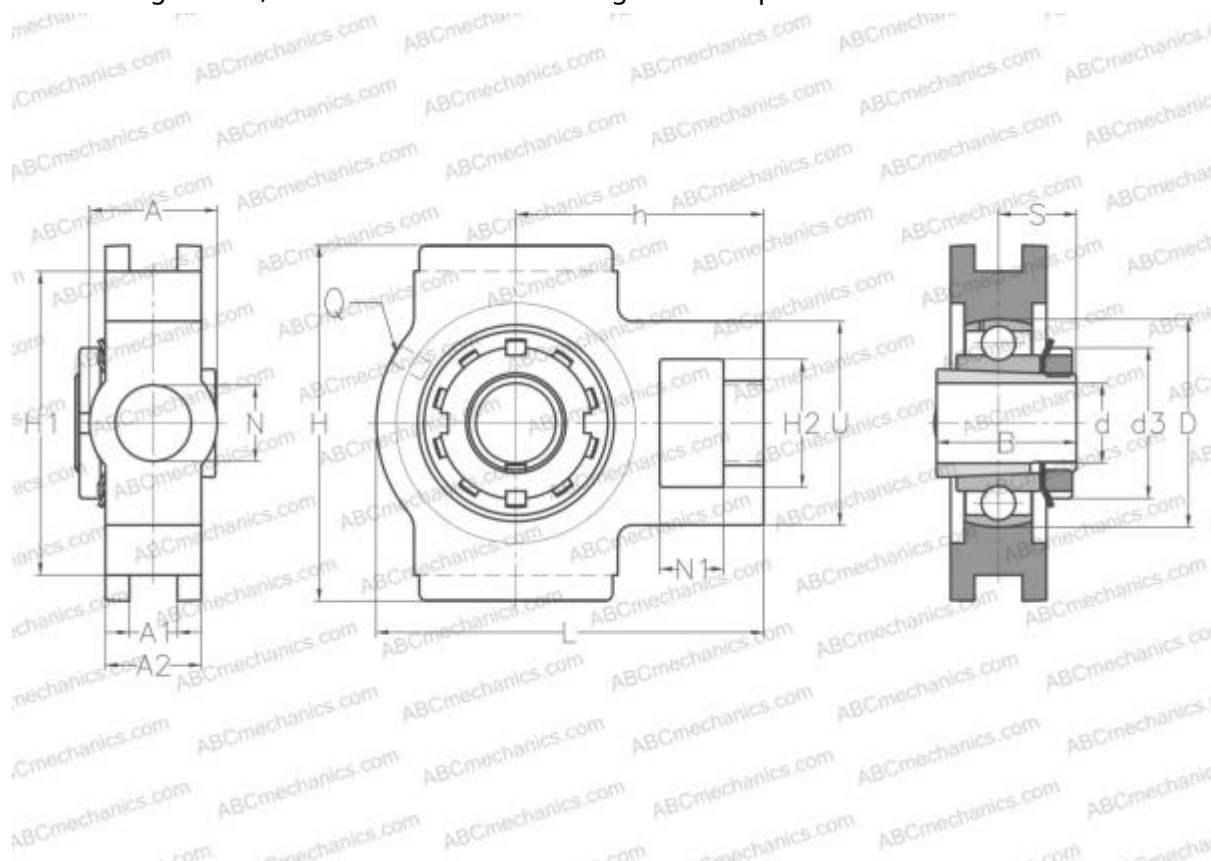

Technical specification

DIMENSIONS, MM

d	25,000
D	72,000
B	38,000
L	137,000
H	100,000
A	41,000
H2	41,000
A1	16,000
A2	28,000
H1	90,000
N	28,000
N1	18,000
S	23,000
d3	45,000
U	70,000

DIMENSIONS, MM

h	85,000
Q	M6x1

WEIGHT, KG

Bearing	UK306 +
Housing	T306
Adapter sleeve	H2306

MANUFACTURER

[SNR](#)

INTERCHANGE

ABC	UKT306H
-----	-------------------------

CALCULATION DATA

Basic dynamic load rating, C	27,000 kN
Basic static load rating, Co	15,200 kN

CALCULATION DATA

Operating temperature min	-20 °C
Operating temperature max	110 °C