


USC203 SNR

Ball bearing units

TYPE: Housing units, Cartridge units, Cast iron housing, Radial insert ball bearing with grub screws in inner ring, With inner ring extended at one side

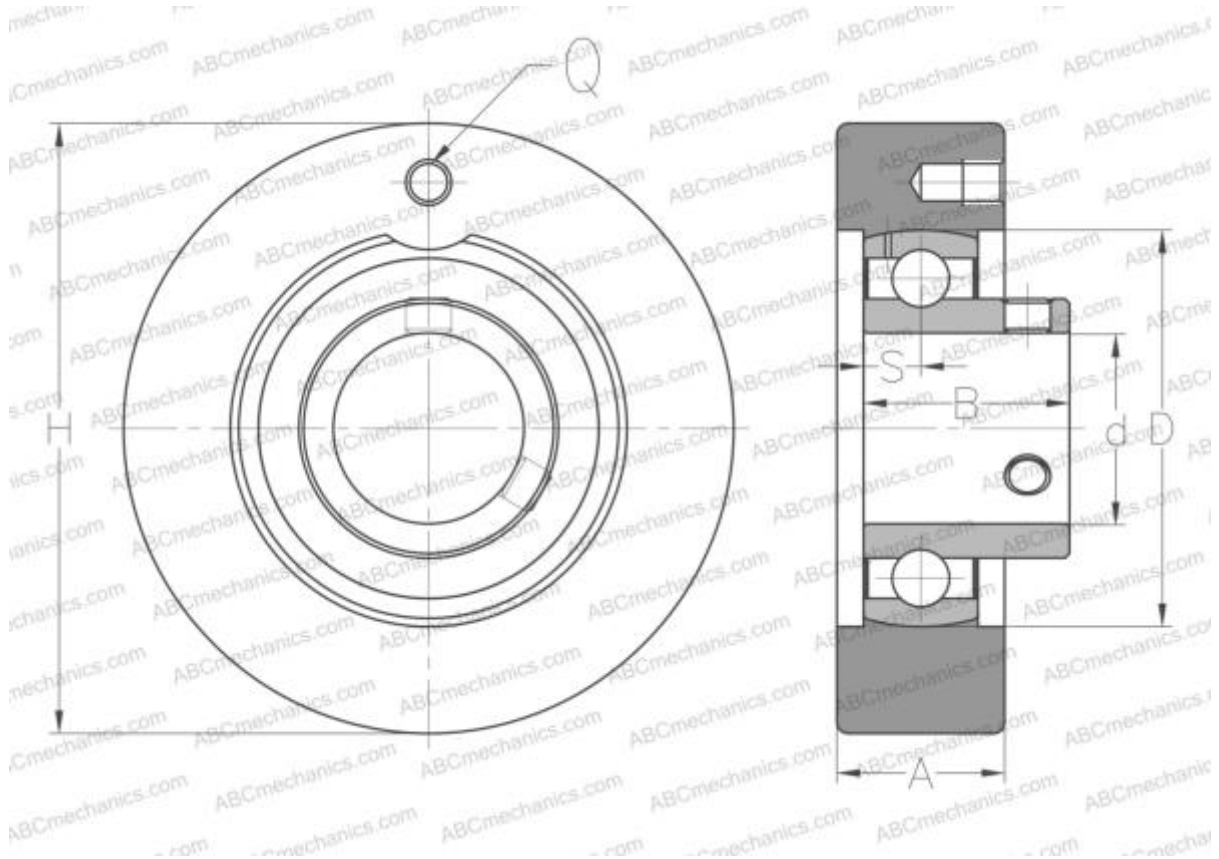

Technical specification

DIMENSIONS, MM

| | |
|---|--------|
| d | 17,000 |
| D | 40,000 |
| B | 22,000 |
| H | 67,000 |
| A | 20,000 |
| S | 6,000 |
| Q | M6x1 |

WEIGHT, KG

| | |
|---------|-------|
| Bearing | US203 |
| Housing | C203 |

MANUFACTURER

[SNR](#)

INTERCHANGE

| | |
|-----|------------------------|
| ABC | USC203 |
|-----|------------------------|

CALCULATION DATA

| | |
|------------------------------|----------|
| Basic dynamic load rating, C | 9,550 kN |
| Basic static load rating, Co | 4,780 kN |
| Operating temperature min | -20 °C |
| Operating temperature max | 110 °C |